

ASTRO

State-of-the-Art Instruments



PHYSICS

*Dedicated to
Craftsmanship!*

for Discriminating Astronomers

900GTO GERMAN EQUATORIAL WITH GTOCP3 SERVO MOTOR DRIVE

FOR MOUNTS SHIPPED STARTING IN
NOVEMBER, 2011 AND ALL
PREVIOUS 900GTO MOUNTS



ASTRO-PHYSICS, INC.

11250 Forest Hills Road

Maohesney Park, IL 61115

Telephone: (815) 282-1513

Fax: (815) 282-9847

support@astro-physics.com

www.astro-physics.com

December 2, 2011

ASTRO-PHYSICS

900GTO GERMAN EQUATORIAL WITH GTOCP3 SERVO MOTOR DRIVE

ABOUT THIS MANUAL	3
MODEL 900GTO PARTS LIST	4
MECHANICAL SPECIFICATIONS	5
INTRODUCTION	6
Why Polar Alignment is Important	6
ASSEMBLY DIAGRAM	7
BEFORE YOU LEAVE HOME	8
Gross Latitude Adjustment for 900GTO German Equatorial Mounts	8
Attach Pier Adapter to Pier Post (purchased separately)	10
Standard Pier Adapter (900SPA)	10
Precision-Adjust Rotating Pier Adapter with Azimuth Bearing (900RPA)	11
Hi-Lo Latitude Wedge Pier Adapter Assembly (900WDGA) or Wedge (900WDG)	12
AT YOUR OBSERVING SITE	13
Assemble Pier (purchased separately)	13
Attach Polar Axis Assembly to Pier or Tripod	13
Polar Alignment – Part 1 – Rough Alignment	14
Altitude and Azimuth Adjustments - Rough polar alignment	14
Assemble Declination Axis	15
Removing Declination Axis at the End of Your Observing Session	15
Attach Mounting Plate	16
Fixed Mounting Plate Options	16
Losmandy D-Series Compatible Saddle Plates	17
Astro-Physics Dovetail Options	17
Side-by-Side, Vixen Style and Other Plate Options	18
Attach Counterweight Shaft and Counterweights	19
Attach Mounting Rings and Scope	19
CLUTCH KNOBS, BALANCING AND FINE POLAR ALIGNMENT	20
Understanding the R.A. and Dec. Clutch Knobs	20
Balancing Your Telescope	21
First, Balance the Declination Axis	21
Second, Balance the Polar Axis	21
Polar Alignment – Part 2 – Fine Polar Alignment	21
Methods for fine polar alignment	22
Making Precise Altitude and Azimuth Adjustments	23
Fine Altitude Adjustment	23
Tips for Adjusting the Altitude	23
Fine Azimuth Adjustment	23
Precision-Adjust Rotating Pier Adapter with Azimuth Bearing (900RPA)	24
Standard Pier Adapter (900SPA) and Hi-Lo Latitude Wedge (900WDGA)	24
Azimuth Adjuster Knob Locking Screws:	25

CABLE MANAGEMENT	26
900 Motor Cables	26
Accessory Cables	26
Optional Accessories to Prevent Cable Snags	26
Example from International Space Station – Amateur Telescope (ISS-AT) Project	27
MOUNT CARE, CLEANING AND MAINTENANCE	28
Care	28
Cleaning and Touch-up	28
Routine Mount Maintenance	28
TROUBLESHOOTING, TIPS AND SUPPORT	29
Troubleshooting and Tips	29
Additional Support	31
STANDARD PIER ADAPTER OF THE 900GTO MOUNT	32
USEFUL DIMENSIONS FOR OBSERVATORY PLANNING	33
CLUTCH PLUG REPLACEMENT FOR 900 OR 1200 MOUNT	34
Construct Your Own Clutch Plug Extraction Tool	35
CHARACTERIZING THE DEC. AXIS MOTIONS	36
ASTRO-PHYSICS MOUNTING PLATE FASTENER CHART	37

ASTRO-PHYSICS

900GTO GERMAN EQUATORIAL WITH GTOCP3 SERVO MOTOR DRIVE

ABOUT THIS MANUAL

This version of the 900GTO Manual was prepared for the production run of mounts that began shipping in November of 2011. Most of the information in this manual is applicable to all 900GTO's that have been produced. Some of the information in this manual was simply not available when the first 900GTO's left our factory back in 1998. This includes information on newer accessories for the mount that weren't available for the first production runs. We have also learned a few things through experience and the suggestions of our customers that have improved the information that is available in this manual.

You should also note that this manual is actually one component of a three document system. We have always had two manuals for each mount - one for the individual mount and another manual for the keypad that applied to all mounts. Starting in the summer of 2011, we further divided the mount manuals to allow us to present the GTO Servo Motor Drive System in greater detail. Like the Keypad Manual, the GTO Manual is universal to all mounts that use the Astro-Physics GTO Servo Motor Drive System with the GTOCP3 Servo Control Box. This 900GTO Manual, on the other hand, will cover the 900GTO's mechanical features and physical operations.

Please note that we are continually working to improve our products and, as a consequence, some of the drawings, photographs and descriptions found in this manual may not reflect the latest appearance of the product. That being said, we suggest that all 900GTO owners adopt this manual for regular guidance with their mounts. The benefits of the improved information should easily outweigh the minor differences between mounts from earlier production runs and the current one. There will be a few things like the included serial cable, the GTOCP3 Servo Control Box and the Heavy Duty Azimuth Adjuster that owners of older mounts will not have. In a similar fashion, owners of brand new mounts should be aware that some of the photos that were used in this manual are of mounts from earlier production runs. You may therefore see some slight differences whether you have a brand new mount, or an earlier mount, but none of these were deemed to be of significance.

As always, we highly recommend the Technical Support Section of our Web site for the latest information and for future updated versions of this manual.

A final note and an apology to our friends in the southern hemisphere. Many of the instructions in this manual are written entirely from the point of view of those of us in the northern hemisphere. Since descriptive terms like left and right are meaningless without a defined point of reference, we tend to use east and west to avoid ambiguity. The east and west sides of a German equatorial mount are, of course, reversed in the southern hemisphere. At one point, our thought was to always use phrases like the following: "... on the east side (west side in the southern hemisphere) ..." This quickly became cumbersome and made the text more difficult to read. For simplicity, we decided to leave many of the explanations in their northern hemisphere framework. To our southern hemisphere friends: *We love you no less and apologize for this unintended slight.* We know, however, that **you are all smart enough** to make the necessary translation to "down under" appropriate instructions. Thank you for your understanding.



PLEASE RECORD THE FOLLOWING INFORMATION FOR FUTURE REFERENCE

Mount Serial Number: _____

Keypad Serial Number: _____

GTOCP3 Serial Number: _____

Purchase Date: _____

MODEL 900GTO PARTS LIST

- 1 Polar axis assembly (right ascension-R.A.) with GTO Servo Control Box (Model GTOCP3)
- 1 Declination (Dec.) axis assembly
- 1 14" (12.875" usable) Stainless counterweight shaft (1.875" dia.) with machined, black-anodized, safety stop
- 1 Y-cable – R.A. portion is 15.25" long and Dec portion is 40.25" long
- 1 D.C. power cord (cigarette lighter adapter on one end) - 8' long
- 1 Serial Cable – Straight-through –15 feet long
- 1 GTO Keypad controller with 15' coiled cable, installed Keypad Protector (KEYPRO), and Instruction Manual
- 1 Hex key set
- 2 8-32 Thumbscrews (substitute for set screws to allow quick disconnect of GTO control box)
- 1 *PEMPro*™ v.2.x – Full Version - Periodic Error Management software for Astro-Physics mounts (CD-ROM)
- 1 *PulseGuide*™ by Sirius Imaging – remote control utility for improved guiding (CD-ROM)

In order to assemble your mount fully, you will need the following items sold separately:

- **Telescope mounting plate:** Many choices to fit your telescope and observing needs. See page 16
- **20° to 68° latitude:** choose either the Standard Pier Adapter (900SPA) or the Precision-Adjust Rotating Pier Adapter with Azimuth Bearing (900RPA). Either adapter will come with six 5/16 – 18 X 5/8" button head screws for attachment to the pier, four pier knobs for attaching the mount to the adapter, and the azimuth block for use with the Heavy Duty Azimuth Adjuster found on all 900GTO mounts produced after August, 2005 and available as an upgrade for earlier mounts.
- **Tropical or extreme polar latitudes (0° to 20° or 68° to 88° North or South):** choose the Hi-Lo Latitude Wedge Pier Adapter Assembly (900WDGA) or the Wedge alone (900WDG) if you already have the knobs and azimuth block.
- **8" O.D. pier:** Astro-Physics has several heights and styles to choose from.
- **Counterweights:** 5 lb. (5SCWT), 10 lb. (10SCWT) and 18 lb. (18SCWT) are available.
- **Portable rechargeable 12 volt battery pack:** Several sizes and types are available from a variety of vendors. Be sure that your battery pack can supply adequate power for an entire observing session! Please refer to power requirements in the GTO Servo Motor Drive System manual. We recommend having separate batteries – one for the mount and one for all other accessories: camera, dew removers etc.
- **Regulated Power Supply (110V AC to 12V DC converter):** We offer two choices: 13.8 volt 5 amp supply (PS138V5A) or 15 volt, 10 amp supply (PS15V10A). Both supplies are filtered and regulated.

Many of these items will be discussed throughout these instructions. Several additional options are available:

- **Polar Alignment Scope (PASILL4L):** (Prior versions sold by Astro-Physics will also work.) Threads into the base of the polar axis assembly. Many users find a polar alignment scope useful for zeroing in on the pole quickly, particularly with telescopes that are not orthogonal to the mount.
- **Pier Accessory Trays and Support Bars:** Accessory Tray (TRAY08) and/or Eyepiece Accessory Trays (TRAY08H), both for 8" piers, with Bi-Level (TRAYSB) or Single Level (TRAYSB1) Support Bars. Handy to keep your eyepieces and other accessories close at hand!
- **Counterweight Shaft Options:** Longer counterweight shaft (M12601-D) – 19.5" (18.5" usable) stainless steel shaft or 9" counterweight shaft extension (M12675)
- **900 Flat Surface Adapter (900FSA):** for attaching one of our pier adapters to your own custom pier or tripod.
- **Losmandy Tripod Adapter (LT2APM):** for attaching 900GTO to Losmandy Heavy Duty Tripod or Losmandy MA Meade Field Tripod Adapter.
- **Autoguiding Accessories:** Various imaging and CCD based guiding configurations can take advantage of the 900GTO's autoguider port. The autoguider port receptacle (RJ-11-6) uses the industry standard SBIG ST-4 wiring setup. See the GTO Manual for more.
- **Extension cable for keypad:** Please call Astro-Physics to obtain a quote on the length of extension cable you need.

For a complete listing of our 900GTO accessories, visit our website – www.astro-physics.com

Note on Encoders: Mounted encoders can no longer be used with the 900GTO (for mounts shipped starting in October, 2005 – beginning serial number 900451) because of the R.A. shaft re-design. They are not needed since the go-to functions of the mount are so much more accurate. The encoder that is built into the servo motor itself has a resolution of 0.05 arc seconds vs. 324 arc seconds for mounted encoders.

MECHANICAL SPECIFICATIONS

Construction	All CNC machined aluminum bar stock, stainless steel, brass; stainless steel fasteners
Worm wheel - R.A.	7.2" (183 mm), 225 tooth aluminum
Worm wheel - Dec.	6.0" (152 mm), 225 tooth aluminum
Worm gear - R.A.	Brass, 0.710" (18 mm) diameter
Worm gear - Dec.	Brass, 0.705" (17.9 mm) diameter
Thrust Bearing - R.A.	7.0" (178 mm) diameter
Thrust Bearing - Dec.	6.0" (152 mm) diameter
Axis shaft - R.A.	2.20" (56 mm) diameter
Axis shaft - Dec.	1.75" (44 mm) diameter
Shaft axis bearings - R.A./Dec.	Each shaft is supported by 5 bearing elements; two preloaded ball bearings and 3 sets of massive thrust bearings
Latitude range	20 - 68 degrees with or without polar scope attached; (0-20 and 68-88 degrees when using Hi-Lo Latitude Wedge (900WDG or 900WDGA))
Azimuth adjustment	Approximately 15 degrees (+/- 7.5 degrees from center)
Setting circle - R.A.	4-minute increments, pointer, engraved both Northern/Southern, Porter Slip Ring
Setting circle - Dec.	1 degree increments, pointer, Porter Slip Ring
Counterweight shaft	1.875" (48 mm) diameter x 14" (356 mm) long [12.875" (327 mm) usable length], includes large machined safety stop knob. Optional 9" (229 mm) shaft extension is available.
Weight of mount	Total: 54 lb. (24.5 kg) R.A. axis / polar fork: 26.5 lb. (12.0 kg) Dec. axis: 17 lb. (7.7 kg) Counterweight shaft: 10.5 lb. (4.8 kg)
Capacity of mount	Approximately 70 lb. (31.8 kg) scope and accessories (not including counterweights), depending on length. Recommended for: Astro-Physics and similar fast refractors up to 180 mm f9, 12" Cassegrains, 12.5" CDKs, 12-14" Ritchey-Chretien. These are only guidelines. Some telescopes are very long for their weight or heavy for their size and will require a larger mount. Remember also that imaging requirements are more rigid than visual observation.
Instrument mounting interface	Refer to the mounting plate section of the manual on page 16.
Pier adapter base	7.730" (196.34 mm) diameter. The base is part of the chosen pier adapter - either the Rotating Pier Adapter (900RPA), the Standard Pier Adapter (900SPA), or the Hi-Lo Latitude Wedge (900WDGA or 900WDG). The desired pier adapter must be purchased separately.

For a complete listing of the servo control, power, and periodic error specifications, please see the GTO Servo Motor Drive System Manual.

INTRODUCTION

The 900GTO German equatorial was designed to meet the needs of the advanced observer who requires a mount with maximum strength and rigidity and minimum weight. The excess material in both axes has been carved out while retaining a heavily ribbed structure for internal strength and rigidity. A unique dovetail was machined into the mating surfaces of the R.A. and Dec. axes. This feature allows quick and easy assembly in the field without any tools.

The advent of modern CCD cameras and telescopes with high-resolution optics has placed greater demands on the ability of mounts to do their part to achieve precision tracking and guiding. At the same time, the mount should be easy to use with adjustments and setup procedures that are straight-forward and accurate. We have done everything possible to eliminate the frustrations and limitations inherent in a lesser mount and so put the fun back into the hobby of amateur astronomy.

The 900GTO employs the reliable and sophisticated Astro-Physics GTO Servo Motor Drive System. This system uses precise Swiss DC servo motors under the control of the remarkable GTOCP3 Servo Control Box. The GTOCP3 is truly the "brains" of the system taking your wishes as expressed through an external device like the Astro-Physics GTO Keypad, a computer, or even some wireless devices, and translating those wishes into actions taken by the mount.

A full range of mount operations is available from the included GTO Keypad. This advanced keypad's features allow you to slew automatically to objects in a wide range of databases, as well as any R.A. / Dec. coordinates. A large selection of common names for stars and other objects makes your selection a snap. Keypad operation is simple and intuitive.

Various additional options such as PulseGuide™ software (included with the mount) and our fully supported AP V2 ASCOM driver are also available to make the connection between you - the astronomer, and the servo system versatile and straightforward.

The 900GTO's control and performance options will be further enhanced by the upcoming Astro-Physics Command Center (APCC). This exciting software is in its last phase of beta testing at the time of this writing, and the first official release will be available soon. APCC will fully address all the capabilities of the 900GTO, and will add enhancements not currently available anywhere else. More information on all the mount control options can be found in the separate Astro-Physics GTO Servo Motor Drive System Manual.

The 900GTO also includes a full version of PEMPro v.2.x, and as an added bonus, all 900GTO mounts will come pre-loaded with the custom-fitted PEMPro™ corrections from our extensive individual testing that is performed on each and every mount. While the native, uncorrected, periodic error of your 900GTO will be 7 arcseconds or less, it will have been reduced even further to maximize performance without auto-guiding.


The 900GTO is equally at home in a permanent observatory or as a portable mounting for remote star parties thanks to the ease with which the two axes come apart. This is the perfect mount for a mid-sized refractor, Newtonian, Cassegrain or astrograph. Whether you enjoy visual astronomy exclusively or plan an aggressive astrophotography or CCD imaging program, this mount will allow you to maximize your night out under the stars.

In order to fully enjoy your first night out, we recommend that you familiarize yourself with the assembly and basic operation of the mount indoors. The temperature will be comfortable, the mosquitoes at bay, and you'll have enough light to see the illustrations and read the manuals.

Why Polar Alignment is Important

Polar alignment compensates for the Earth's rotation.

If you were to take a long exposure photograph with Polaris (often called the North Star) in the center of the field, you would discover that all stars seem to revolve around Polaris. This effect is due to the rotation of the earth on its axis. Motor driven equatorial mounts were designed to compensate for the earth's rotation by moving the telescope at the same rate and opposite to the earth's rotation. When the polar axis of the telescope is pointed at the celestial pole (polar aligned) as shown in the diagram, the mount will follow (track) the motions of the sun, moon, planets and stars. As a result, the object that you are observing will appear motionless as you observe through the eyepiece or take astrophotos.

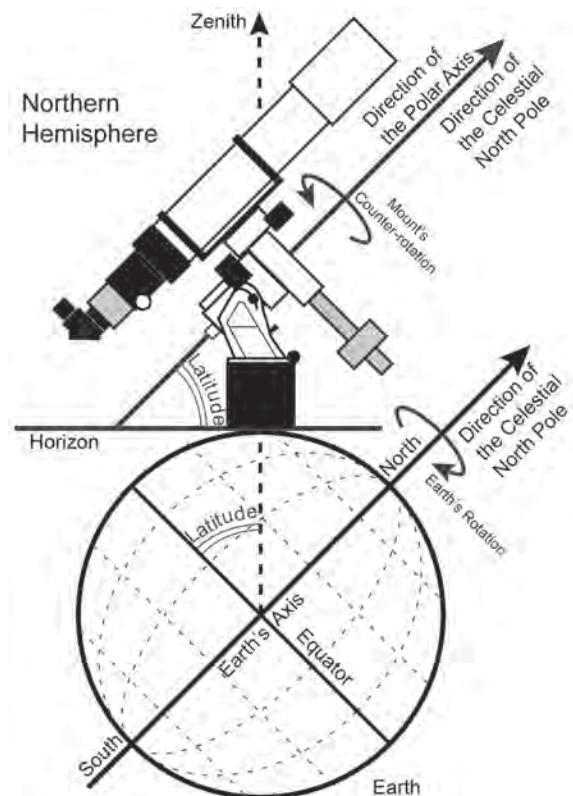


ASSEMBLY DIAGRAM

Please read all instructions before attempting to set up your 900GTO mount. The model 900 is very rugged, however like any precision instrument, it can be damaged by improper use and handling. Please refer to the following illustrations. The parts are labeled so that we can establish common terminology.

The following terms and abbreviations are used interchangeably in these instructions:

- polar axis = right ascension axis = R.A. axis = R.A. housing
- declination axis = Dec. axis = Dec. housing

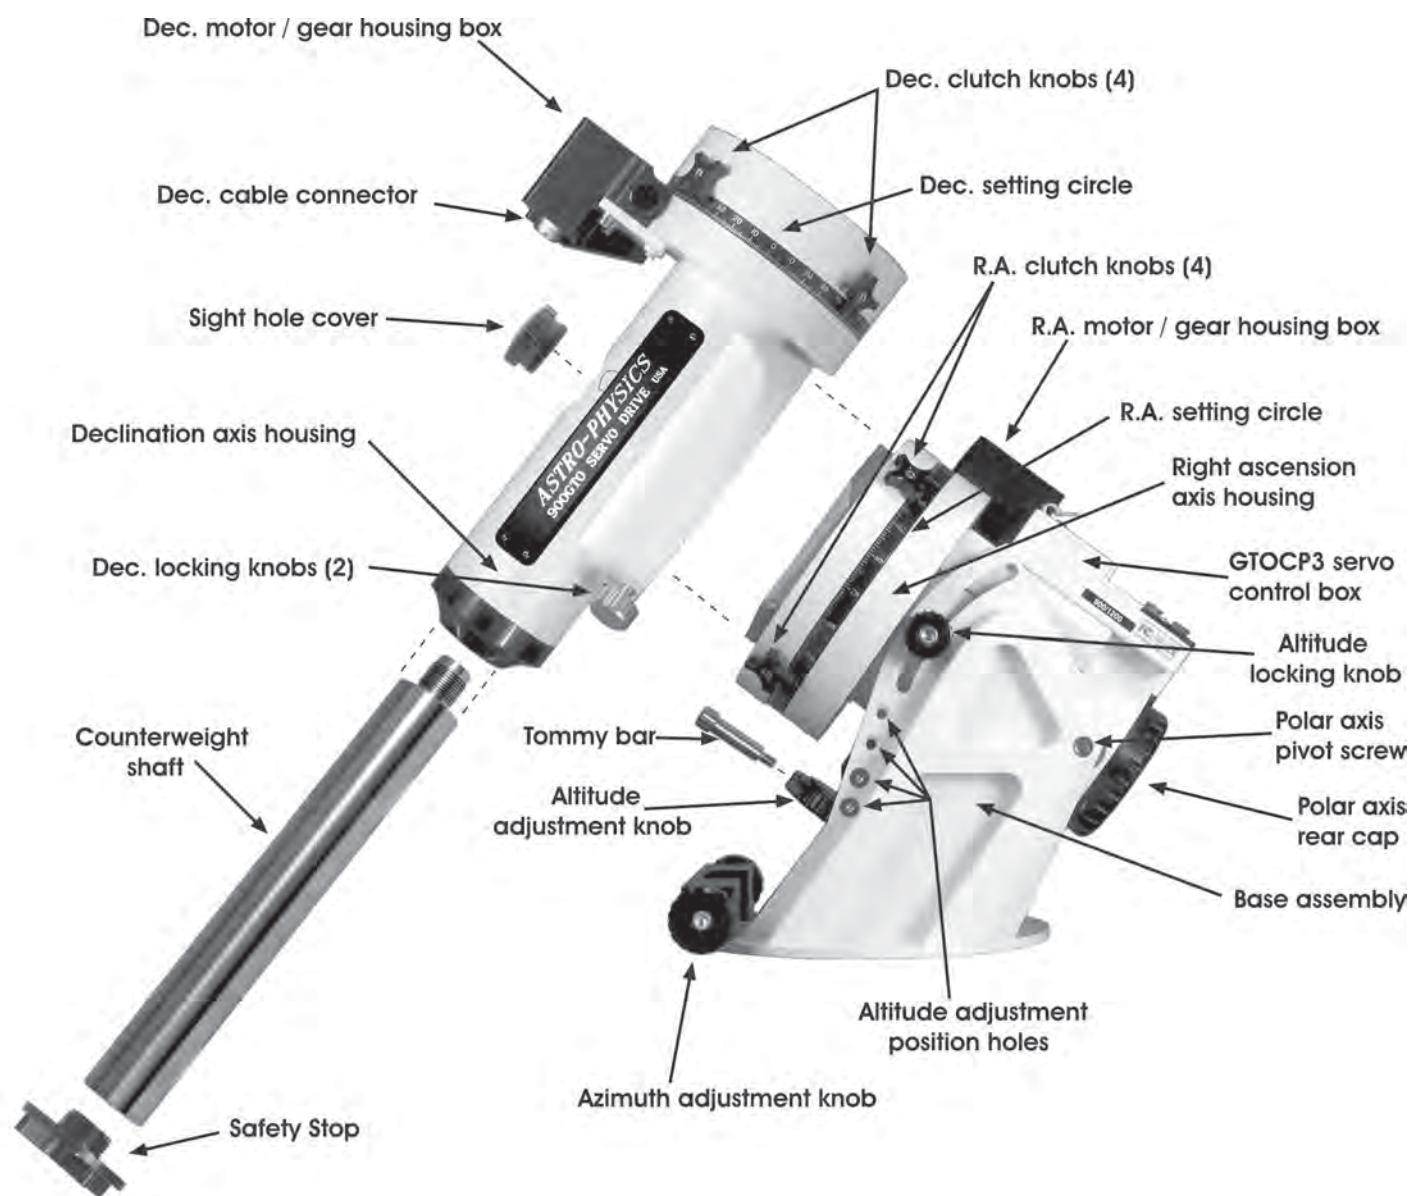

BEFORE YOU LEAVE HOME

Since most of us must set up our instruments in the dark, in the cold or while battling mosquitoes, a bit of preplanning and organization is important. There are a few simple things that can be accomplished in the comfort of your home before heading outside.

Gross Latitude Adjustment for 900GTO German Equatorial Mounts

Degree ranges specified below apply to mounts shipped starting in May 2006. Older mounts will have slightly different latitude ranges unless they were upgraded with the taller polar fork.


The latitude range of the 900 mount is approximately 20-68 degrees. Since most astronomers typically observe within one latitude range, this first adjustment is made just once, if at all. Prior to shipment, we preset the mount to your latitude range for your convenience. If you travel to another observing location, determine the latitude of your observing site and make the appropriate adjustment. If you live in or plan to travel to tropical locations that are 0 to 20 degrees latitude north or south, or extreme polar sites that are between 68 and 88 degrees north or south, we recommend our Hi-Lo Latitude Wedge Pier Adapter Assembly (900WDGA). Pier Adapters are discussed fully later in the manual.

The four positions for the altitude adjustments have the following approximate ranges:


- 52 degrees to 68 degrees latitude - top position
- 41 degrees to 59 degrees latitude - third position
- 30 degrees to 45 degrees latitude - second position
- 20 degrees to 34 degrees latitude - bottom position

How to change the position of the altitude adjuster

1. Use only the R.A. axis. DO NOT attempt to make these adjustments with the declination axis in place and certainly not with an instrument fully mounted.
2. Loosen both altitude-locking knobs about 1 turn.
3. Locate the side of the polar axis that does not have the black motor/gear housing box. Loosen (about 1 turn) the polar axis pivot screw and altitude adjuster bar fixing screws on this side only. With your hand, push the polar axis upwards so that the altitude-locking knobs are positioned at the top of the altitude adjustment slots (this is the maximum altitude position). Some resistance will be felt with this operation as you are pushing against the weight of the polar housing and the resistance of the remaining polar axis pivot screw (which has not been loosened).

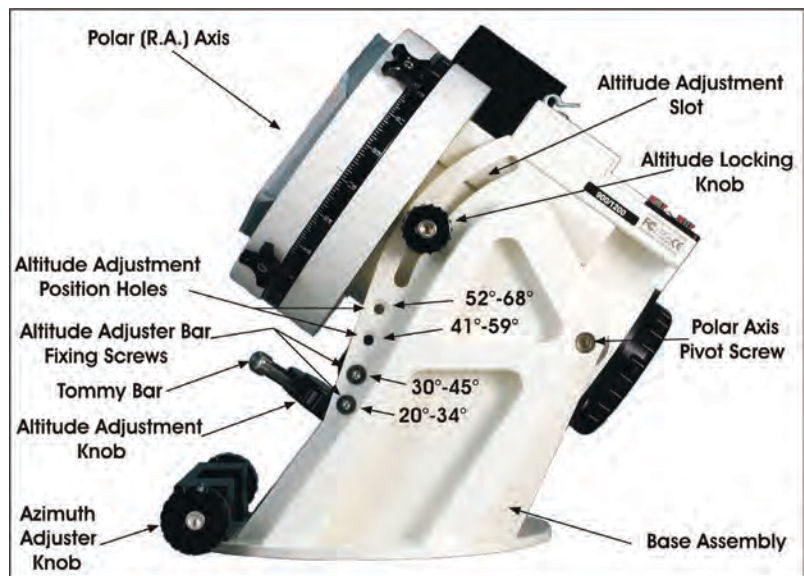


4. Before attempting to move the altitude adjuster bar, you must tighten the altitude-locking knob on the motor/gear housing side. This will prevent any downward movement of the polar axis during positioning of the altitude adjuster bar.
5. While supporting the altitude adjuster bar, remove the two altitude adjuster bar fixing screws that support it on each side (4 screws in all), but keep the two ends of the bar in contact with the side of the mount, don't remove it completely (this tip is for your convenience).
6. Determine the latitude range that you need and position the altitude adjuster bar so that the hole that is marked "A", as shown in the diagram, is located at the appropriate hole position numbered 1-4 in the lower diagram. Note that hole "A" is located at the rounded part in the center of the altitude bar. Hole "A" is the "latitude hole."
7. Attach two of the screws (one on either side of the adjuster bar) through the appropriate altitude adjustment position hole and into hole A of the adjuster bar, but do not tighten. Rotate the altitude adjuster bar around this pivot

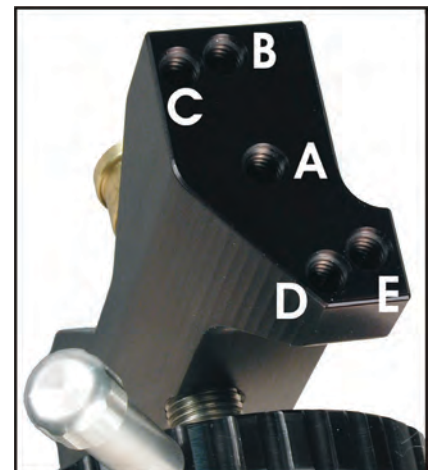

point until the corresponding hole lines up. Consult the labeled photo to determine which hole of the altitude adjuster bar should be used. **Be very careful** since the holes marked C and B are very close to one another, as are the holes marked D and E. The incorrect hole may appear to line up, however it will be slightly off. If you try to attach at the incorrect hole, you may strip the threads of the altitude bar. The correct hole will orient the adjuster to be roughly perpendicular to the axis once the axis is lowered into place.

8. Once you have located the correct hole, insert the remaining two screws, and lightly tighten so that you still have some ability to wiggle the bar.


9. Note that the altitude adjustment knob is attached to a threaded rod that travels through the altitude adjuster bar. Turn the knob so that the altitude adjuster bar is positioned approximately in the middle of the threaded rod. You should see about half of the threaded rod protruding from both sides of the altitude adjuster bar. This will allow you to move the mount fully within the altitude range.

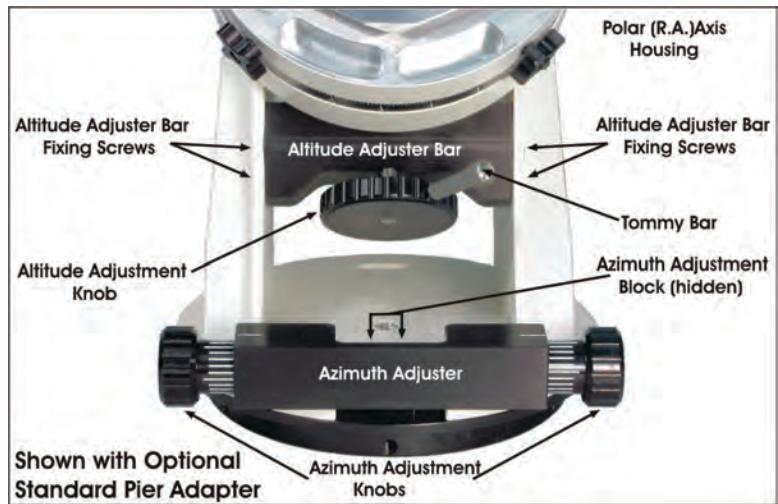

10. At the end of the threaded rod mentioned in the last step, you will see a small brass altitude adjuster thrust pad. This is the part that will come in contact with the polar axis as you ease it back into position. Loosen the altitude-locking knob (motor/gear side) and lower the polar axis so that it rests comfortably on this pad. The threaded rod should be positioned at a right angle to the polar axis housing. Firmly tighten the altitude adjuster bar fixing screws.

11. Turn the altitude adjustment knob to raise or lower the polar axis to your approximate observing latitude. Tighten the altitude locking knobs with finger pressure only. You do not need to tighten with the hex key.

12. Firmly tighten both polar axis pivot screws with the hex key.

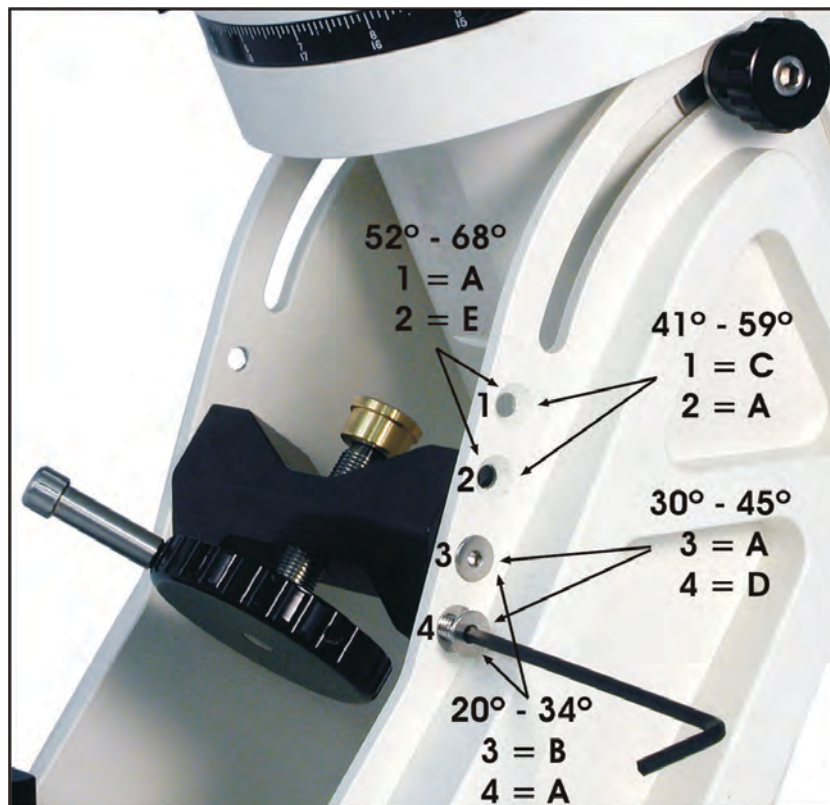


Attach Pier Adapter to Pier Post (purchased separately)

If you purchased the pier from Astro-Physics, the pier adapter of the 900 will attach right to the top of the pier. If you are constructing your own pier or tripod, you will need to incorporate this part. Three models of the pier adapter are now available for use with the 900 from Astro-Physics. The Standard Pier Adapter (900SPA) and the Precision Adjust Rotating Pier Adapter (900RPA) are the choices for people living within the mount's 20 to 68 degree latitude range. For customers in tropical or extreme polar latitudes, the third adapter: the Hi-Lo Latitude Wedge is also available as either a complete assembly (900WDGA) or as the Wedge alone (900WDG). If you have more than one pier, you may wish to purchase two adapters so that you can leave them attached permanently. You will probably want to attach the pier adapter to the pier post before going to your observing site. We recommend that you leave whichever pier adapter you choose attached to your pier post for transport and storage. These pier adapters can be used with all prior versions of the 900 mount.

If you did not purchase one of our pier adapters described below - for instance, if you purchased the Monolith Pier from Particle Wave Technologies, you will need to purchase the Pier Adapter Knob Kit (part# 9KBBKIT) in order to attach your mount to the Monolith.

Important notes for all three pier adapters or when using the Monolith Pier :

- The washers for the pier adapter knobs must be positioned with the smooth surface and rounded edge down so that the assembly can be adjusted back and forth. (Not important for the Precision-Adjust Rotating Pier Adapter.)
- Do NOT remove the center pivot screw. Just as the name implies, this is the point around which the mount rotates (pivots) when making azimuth adjustments. The screw head has been machined to assure a close fit. Please do not replace it with another screw.

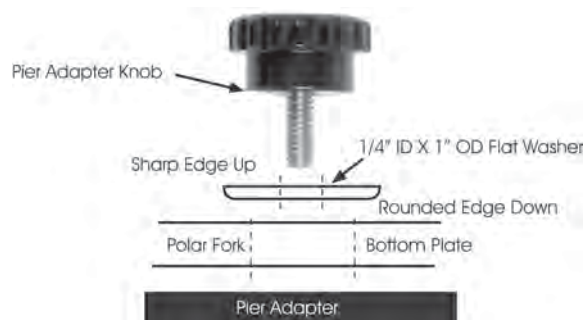

Standard Pier Adapter (900SPA)

This 900 Pier Adapter is similar to those that we have included with mounts in the past, however the azimuth adjuster block is slightly taller to accommodate the improved azimuth adjuster assembly on all 900GTO mounts produced after August, 2005 (and all upgraded older mounts). If you have a permanent installation, this base is a good choice since you will not have to set up every session.


The adapter includes the machined flat plate, four machined aluminum lock knobs with 1/4" ID x 1.0" OD stainless washers, the azimuth adjuster block, center pivot screw and six 5/16-18 x 5/8 button head screws and washers. All machined parts are black anodized. The Standard Pier Adapter was designed to fit into a 8" x 0.094" wall tube.

Attach to an Astro-Physics pier: To attach the pier adapter to your Astro-Physics pier, simply set the adapter into the top of the pier post, make sure the azimuth adjuster block is on the north side, and fasten from the side with the six screws and washers provided.

Attach to a flat surface on your own pier: If you are mounting to a flat surface of your own design, simply use four 1/4-20 stainless steel cap screws of appropriate length, fastened through the top of your adapter. Refer to the diagram in the back of the manual for bolt pattern information.

If you prefer a more finished look, you may wish to consider using our 900 Flat Surface Adapter (900FSA). The Flat Surface Adapter bolts onto the flat plate on top of your pier or tripod, then the Standard Pier Adapter slips in (just as it fits into our pier) and you fasten from the side with the six screws and washers provided with the Standard Pier Adapter. The bolt circle for attaching the 900 Flat Surface Adapter to your pier is 7.230" diameter.

Using an ATS pier: The O.D. of the plate will need to be modified by ATS for an additional charge.

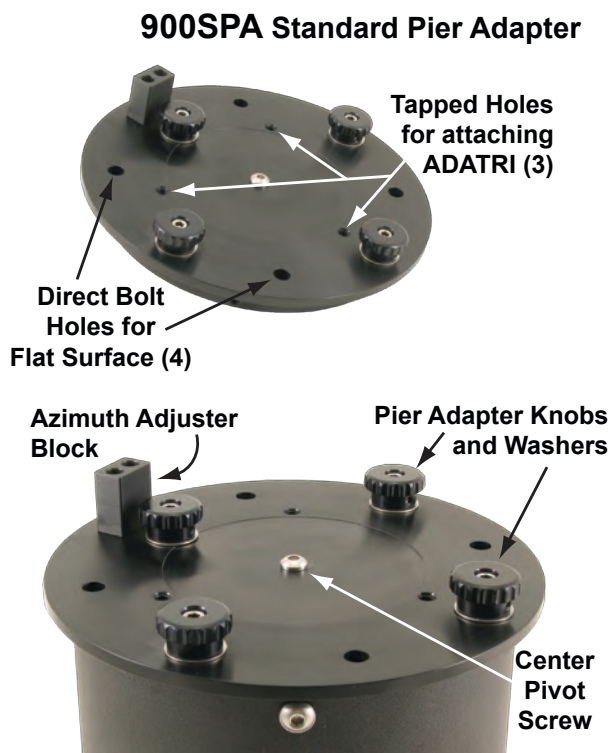


Precision-Adjust Rotating Pier Adapter with Azimuth Bearing (900RPA)

This pier adapter was designed for very accurate and smooth adjustment of the azimuth angle without loosening the lock-down knobs on the base of the mount. The top plate of the adapter rotates through the 900GTO mount's full 15 degrees of azimuth motion. (It does **not** rotate through a full 360 degrees!) This Precision-Adjust Rotating Pier Adapter is the ideal choice for portable setups as it makes azimuth adjustment so easy. Upgrade your previous model 900 mount (any version) and enjoy the ease of use. Do a setup, followed by a fine polar alignment at a remote site just once, and you will wonder how you ever got along without this pier adapter!

The adapter includes the Rotating Pier Adapter assembly, four machined aluminum lock knobs with 1/4" ID x 1.0" OD stainless washers, a tall version of the azimuth adjuster block, center pivot screw and six 5/16-18 x 5/8 button head screws and washers.

900RPA Precision-Adjust Rotating Pier Adapter

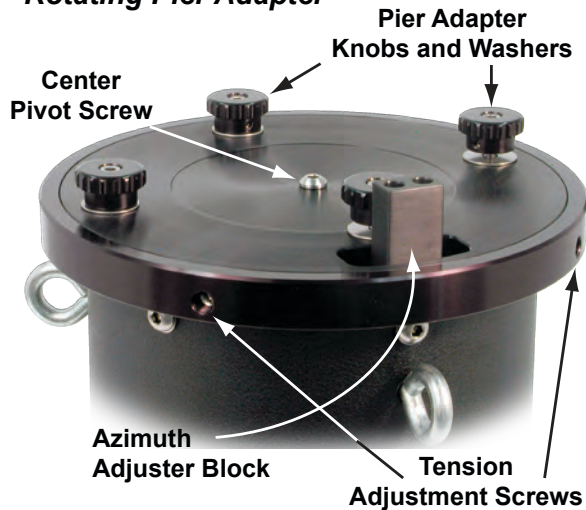

Attach to an Astro-Physics pier: Simply fit the Precision-Adjust Rotating Pier Adapter into your Astro-Physics Portable Pier just like the Standard Pier Adapter and fasten it from the side with the six screws and washers provided. Again, make sure that the Azimuth Adjuster Block is on the north side.

Attach to a flat surface on your own pier: The Precision-Adjust Rotating Pier Adapter must fit inside another part and be bolted from the side. It cannot be bolted through the top as you can with the Standard Pier Adapter. We recommend our 900 Flat Surface Adapter (900FSA). The Flat Surface Adapter bolts onto the flat plate on top of your pier or tripod, then the Precision-Adjust Rotating Pier Adapter slips in (just as it fits into our pier) and you fasten from the side with the six screws and washers provided with the Precision-Adjust Rotating Pier Adapter. The bolt circle for attaching the 900 Flat Surface Adapter to your pier is 7.230" diameter.

Using an ATS pier: If you plan to use an ATS pier, the O.D. of the plate will need to be modified by ATS for an additional charge.

The two recessed screws (3/16 hex), shown by the arrows, adjust the tension between the two plates of the Precision-Adjust Rotating Pier Adapter. These are preset to an optimal tension and should rarely, if ever, need to be re-adjusted. You **do not** need to tighten or loosen these two screws as part of your normal polar alignment routine. For more detailed information regarding this adapter plate, please review the Adobe Acrobat document entitled "Precision-Adjust Rotating Pier Adapter(900RPA) – Information and Instructions" on the Technical Support page of our Web site.

Hi-Lo Latitude Wedge Pier Adapter Assembly (900WDGA) or Wedge (900WDG) for 0 - 20° or 68° - 88° Latitude – North or South

If your latitude is between 20° north and 20° south or between 68° and 88°, either north or south, this wedge assembly includes everything you need to place your 900 mount in the proper position.

This adapter includes the machined wedge and flat plate, the 1.2" Azimuth Adjuster Block, four Pier Adapter Knobs with 1/4" ID x 1" OD flat washers, the center pivot screw, six 5/16-18 x 5/8 socket buttonhead screws and six 5/16 x 9/16"OD x 0.060" flat washers, which enable you to attach the pier adapter to your Astro-Physics pier.

Please note:

1. If you already own another adapter, the Hi-Lo Latitude Wedge may be purchased alone, without the Pier Adapter Knobs, Azimuth Block or Center Pivot Screw. (900WDG)
2. The photo shows the Hi-Lo Latitude Wedge ready to be used at tropical latitudes with the Azimuth Adjuster Block on the low side. For extreme polar latitudes, the plate on top of the wedge can be turned around to extend the useful range of your 900GTO above 68° latitude. Simply remove the two side knobs and then remove the six screws that attach the flat plate to the wedge. Rotate the flat plate 180° and re-assemble with the Azimuth Adjuster Block on the high side.

Attach to an Astro-Physics pier: To attach the Hi-Lo Latitude Wedge to your Astro-Physics pier, simply set the adapter into the top of the pier post, make sure the azimuth adjuster block is on the north side, and fasten from the side with the six screws and washers provided.

Attach to a flat surface on your own pier: The Hi-Lo Latitude Wedge must fit inside another part and be bolted from the side. It cannot be bolted through the top as you can with the Standard Pier Adapter. For custom installations, we recommend our 900 Flat Surface Adapter (900FSA). The Flat Surface Adapter bolts onto the flat plate on top of your pier or tripod, then the Hi-Lo Latitude Wedge Pier Adapter slips in (just as it fits into our pier) and you fasten from the side with the six screws and washers provided. The bolt circle for attaching the 900 Flat Surface Adapter to your pier is 7.230" diameter.

Using an ATS pier: The O.D. of the plate will need to be modified by ATS for an additional charge.




AT YOUR OBSERVING SITE

Assemble Pier (purchased separately)

Begin by assembling the portable pier at the desired observing location. Take note which direction is north. (These instructions are for the Astro-Physics Portable Piers. For other piers, please follow the manufacturer's instructions.)


1. Slide the three legs onto the nubs of the base and rotate the assembly so that one of the legs points toward north (or south, if that is your preference).
2. Place the pier post on the base orienting the center azimuth block directly north. If you choose to have one leg north, then the pier adapter plate will have to be installed with the azimuth block directly over a turnbuckle. If you have one leg south, the pier adapter plate will have to be installed with the azimuth block over and between two of the pier post turnbuckles.
3. Attach the tension rods. The turnbuckles should be drawn tight until the whole assembly is stiff enough to support your weight without movement.

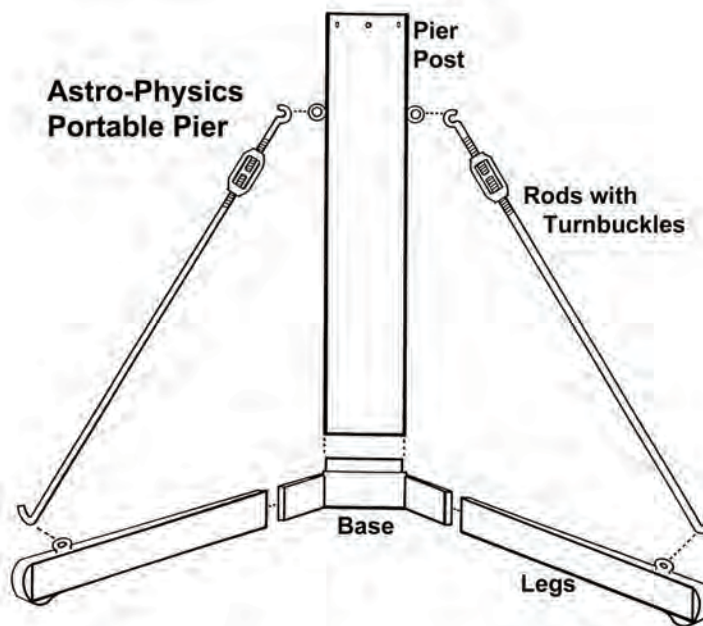

Attach Polar Axis Assembly to Pier or Tripod

In order to track the motion of astronomical objects, the polar axis must be positioned so that an imaginary line drawn through the center of the axis points toward the celestial pole. At this stage of the assembly process, you want to position the pier and mount so that it points roughly north, if you have not already done so.

1. Remove the four (4) Pier Knobs on the Pier Adapter and keep them close at hand.
2. Prior to lifting the polar axis assembly into place, turn the fine azimuth adjustment knobs so that the space between them is wide enough to allow the center azimuth block to fit easily between them. See photo at right. Ensure both Pier Adapter top and polar axis assembly mating surfaces are clean and free of dirt. If you are using the Rotating Pier Adapter, make sure that the Altitude Adjuster Block is centered in the slot of the top plate.
3. Place the Polar Axis Assembly onto the Pier Adapter so that the Azimuth Adjuster Block fits between the fine Azimuth Adjustment Knobs. The Center Pivot Screw on the Pier Adapter (all models) will help you center the mount on the adapter.
4. Move the base of the polar axis assembly so that the threaded holes of the Pier Adapter top can be seen through each of the four slots.
5. For the Standard Pier Adapter or 900 Hi-Lo Latitude Wedge, thread the four Pier Knobs loosely in place (you will tighten these later after polar alignment). For the Rotating Pier Adapter, go ahead and tighten the four Pier Knobs securely.
6. Do not tighten the two Azimuth Adjustment Knob Locking Set Screws located on top of the assembly. These will be explained later.

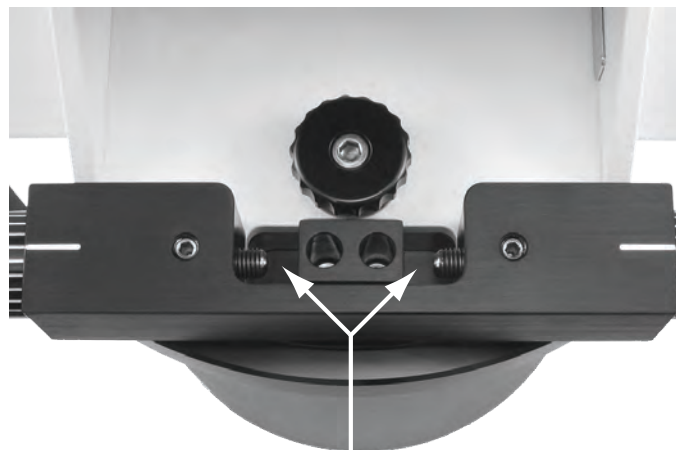

Allow Space for Azimuth Adjuster Block

Polar Alignment – Part 1 – Rough Alignment


We recommend that you accomplish your polar alignment in two phases – rough alignment and fine alignment. Fine alignment will be discussed in a later section of this manual.

Altitude and Azimuth Adjustments - Rough polar alignment

For rough polar alignment, your goal is to sight the celestial pole when looking through the polar alignment sight hole in the center of the polar axis. You will need to make altitude (up/down) and azimuth (side-to-side) adjustments to the position of the mount.

If possible, we recommend that you do your rough polar alignment with the R.A. axis only since you will be making major adjustments to the position of the mount at this time. The remainder of the mount, telescope and counterweights will add considerable weight and require more hand effort. Later, you will do your final polar alignment with the telescope and counterweights attached, but the adjustments will be comparatively small. An inclinometer and a compass adjusted for magnetic declination at your location can be very helpful for daytime setup. Many smart phones have apps for these functions. In addition, be sure to learn the Daytime Polar Alignment Routine as described in the keypad manual. It is a great method for rough alignment, although it does require a fully assembled mount.

1. If the Polar Scope (PASILL4L) is installed, you may remove it to complete these steps.
2. If you examine the polar axis assembly, you will see that the center of the R.A. shaft is hollow. If you have the Standard Pier Adapter or the Hi-Lo Latitude Wedge Pier Adapter and have not done so already, slightly loosen (1/2 turn) the four pier knobs. If you have the Precision-Adjust Rotating Pier Adapter you do NOT loosen the Pier Knobs.

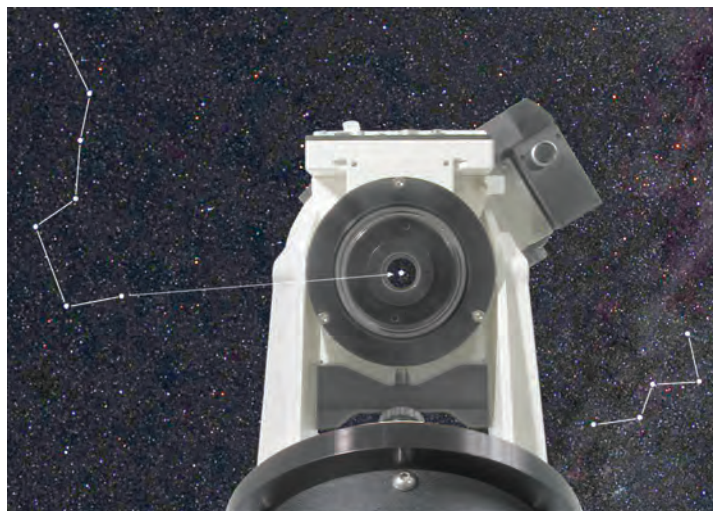

Sighting Polaris through Polar Alignment Sight Hole

NOTE: If you have already attached the Dec. axis, remove the sight hole cover and rotate the internal Dec. shaft by moving the top of the Dec. axis (or the cradle plate if it is attached) to reveal the sight-hole that has been drilled into it. Now, you can look through the shaft to the other side.

3. **Azimuth adjustments:** To begin with, move or turn the entire pier or tripod east or west until the mount is oriented approximately towards the pole (an imaginary line drawn through the hollow shaft). Use the two fine azimuth adjustment knobs, one on each side of the mount, to make adjustments after the pier is as well placed as possible. You must back off the opposing azimuth knob in order to move the other knob in that direction. Please refer to the photos below. These photos also illustrate the 15 degrees of azimuth adjustment possible with this mount.

One full turn of the azimuth knob is approximately 0.53 degrees (31.8 arcminutes). Small graduations are 1.06 arcminutes; long graduations are 5.3 arcminutes.



Pier West of True North - Adjusted East

Pier East of True North - Adjusted West

The best adjustment technique to use with the Astro-Physics Heavy Duty Azimuth Adjuster, with its clear registration marks for fine adjustment, is to back off one of the knobs by a set amount (a certain number of registration marks) and then to turn the other knob until you re-establish contact on both sides of the Azimuth Adjuster Block. You can very precisely zero in on the desired position with no backlash or ambiguity on the position. You can also always go back to

the precise starting point if for some reason you overshoot your mark (or if you adjusted the wrong way), because you know exactly how far you've gone. This is explained further in the section on Fine Polar Alignment.



4. **Altitude (latitude) adjustments:** Loosen the altitude locking knobs. Move the polar axis up or down with the large altitude adjustment knob located in the front of the polar axis assembly. For rough alignment with a mount that is not fully loaded, remove the tommy bar. Later on, during fine alignment, when the mount is loaded, and the adjustments are small, the tommy bar can be positioned in any of the threaded holes located in the altitude adjustment knob to help you turn the knob.

One full turn of the altitude knob is approximately 0.64 degrees (38 arc minutes) There are 30 dimples on the altitude knob. ~ 1.266' or 00°01:16 per dimple.

5. Continue your azimuth and altitude adjustments until you can sight Polaris in the polar alignment sight hole. At this point, you have achieved a rough polar alignment, which may be sufficient for casual visual observations, if you are not planning to slew to target objects with the keypad. When the R.A. motor is engaged (the power is plugged in), it will compensate for the rotation of the earth and keep the target object within the eyepiece field of view. Your target object will slowly drift since polar alignment at this stage is only approximate. However, you can make corrections with the N-S-E-W buttons of your keypad controller.
6. Tighten the altitude locking knobs by hand.
7. If you are using the Standard Pier Adapter or the Hi-Lo Latitude Wedge, tighten the pier knobs firmly by hand. On the Precision-Adjust Rotating Pier Adapter, the knobs will already be tight.

Assemble Declination Axis

1. Do not have your telescope or counterweights connected to the Dec. axis assembly for either assembly or disassembly of the Dec. and R.A. axes.
2. Position the R.A. axis as shown in the illustration at right with the single pocket "A" at the top, opposite the altitude adjuster knob. Firmly tighten R.A. clutch knobs.
3. During shipment, the Dec. axis assembly lock knobs will be fully screwed into the Dec. axis. For correct assembly, these lock knobs should be unscrewed at least 7 full turns and **no more** than 8.5 full turns. This is between 5/16" and 3/8" out from the "shipped" tightened position.
NOTE: These lock knobs can be completely removed from the Dec. axis assembly with about 9.5 full turns out.
4. Position the Dec. axis above the R.A. axis as shown in the lower illustration at right, a light movement (wiggle) in the downward direction (arrow "A") will help to correctly seat the principle dovetail(s) and parallel guides.
5. When both Dec. and R.A. assemblies are fully seated, hand tighten both Dec. lock knobs.
6. Thread the counterweight shaft into the Dec. axis.

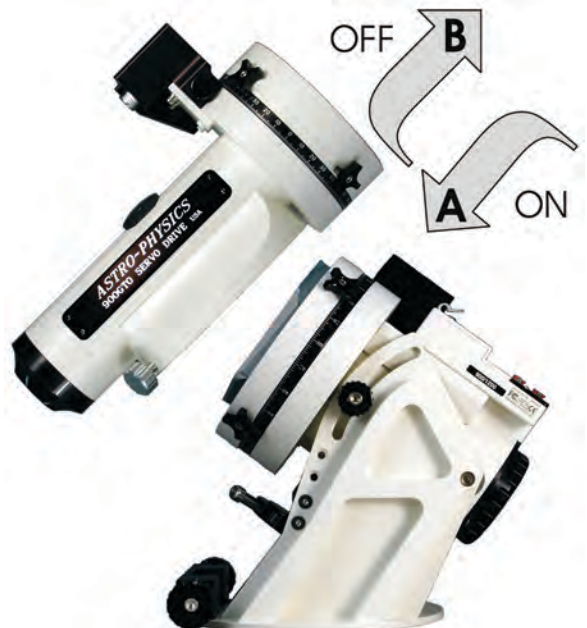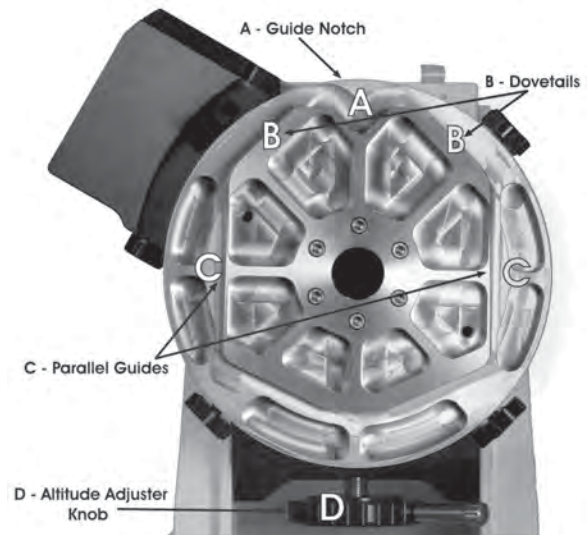

Removing Declination Axis at the End of Your Observing Session


1. Remove your telescope, counterweights and counterweight shaft.
2. Unscrew the lock knobs 5.5 to 7 full turns (this is still 5/16" to 3/8" out from the fully tightened position) and slide/tilt the Dec. axis assembly in an upwards direction (arrow "B" at right).
3. For transport/storage we recommend fully tightening the lock knobs.

Attach Mounting Plate

(purchased separately)

Several mounting plates (also called cradle or saddle plates) are available for the 900GTO mount. If you own more than one instrument, you may need more than one plate, or you may wish to use one of the dovetail mounting plate options with more than one male dovetail sliding bar. Attach your mounting plate with the screws provided with the plate using one of the hole patterns shown at right. It is important to use the proper screws, please refer to the instruction sheet entitled "Mounting Plate Fastener Chart." This chart is available at the end of this manual and in the technical support section of our website.

Note: "0° Opt. Axis" in the illustration at right refers to the setting circle marking at the optical axis – NOT the declination value which is read by the circles position relative to a stationary hash mark on the dec axis body. The actual declination at the AP Park 1 position would be 90° minus your latitude.

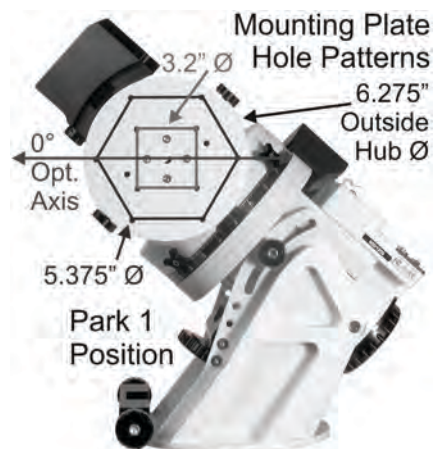


Fixed Mounting Plate Options

NOTE: All three of the plates described below have a hole spacing of 13.75". This allows the use of the 15" dovetail plate (DOVE15) on top of your instrument as an accessory plate.

15" FLAT MOUNTING PLATE (FP1500)


This plate is 15" long by 4.6" wide by 0.5" thick. Two pairs of keyhole slots that measure 3.2" between centers are provided. The pairs are 13.75" apart. You can drill additional holes to suit your needs. This plate also fits the Mach1GTO, 400 and 600E German Equatorial mounts.

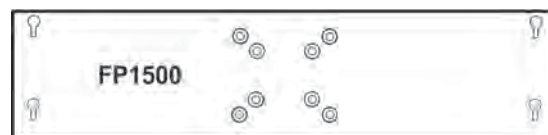

Attach this plate with six 1/4-20 x 1" flat head socket cap screws.

18" FLAT MOUNTING PLATE (FP1800)

This plate is 18" long and 7.5" at its widest point in the center. The width of the plate tapers to 5.5" at each end. Four pairs of keyhole slots that measure 3.2" between centers are provided. The two inner pairs are 13.75" apart and the outer two pairs are 17" apart. You can drill additional holes to suit your needs. This plate also fits the Mach1GTO and 1200 German Equatorials.

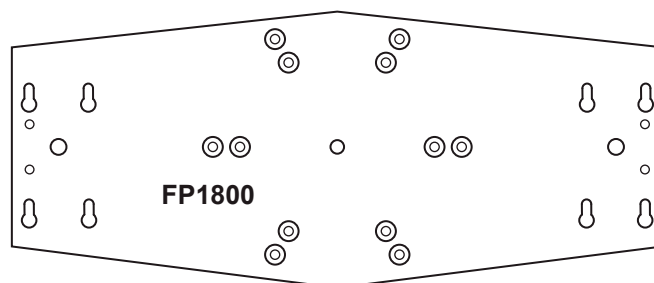


Attach this plate with six 1/4-20 x 1" flat head socket cap screws.

15" RIBBED MOUNTING PLATE (900RP)

The finished plate is 0.75" thick, 15" long and 6.5" at its widest point. The width of the plate tapers to 4.75". A pair of keyhole slots that measure 3.2" between centers are provided at each end. The distance between these pairs of holes is 13.75". Due to the ribbed structure, you may not be able to drill additional holes to suit your mounting rings. The plate weighs 2.3 lbs.

Attach this plate with four 1/4-20 x 1" flat head socket cap screws. Note that the plate is asymmetrical. In most cases, orient the plate so that the long end points toward the sky. You can also turn the plate in the other direction to balance your scope.

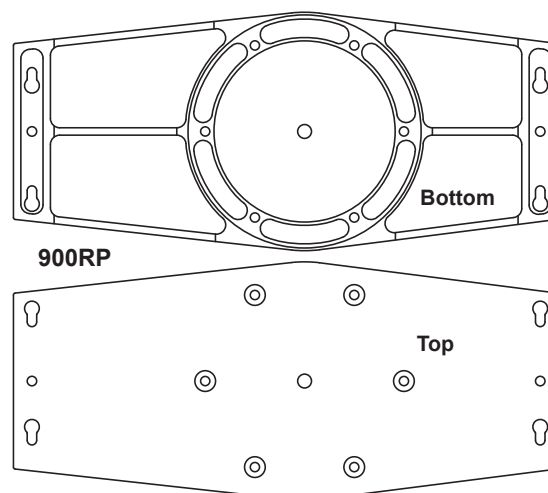


Losmandy D-Series Compatible Saddle Plates

8.5" Dovetail Saddle Plate for Losmandy D Series Plates (DOVELM2)

This Astro-Physics plate attaches to the 400, 600E, 900 and 1200 mounts. If you already own one of the Losmandy DAP series (fits Astro-Physics refractors), DC series (for Celestron 8" or 9.25" SCTs) or DM series (for Meade 8" and 10" SCTs) plates, you should consider this plate or the longer ones below. For larger size and "balance challenged" scopes, we recommend the longer DOVELM162 – see below.

Note that the two bolt-hole patterns are offset from the center. This allows you to position the plate either forward or backward depending on the balance point of your telescope. Attach this plate with four 1/4-20 x 3/4" socket head cap screws and/or two 1/4-20x5/8" flat head socket cap screws.

Additional features include a center position knob-hole for use with short D series plates, a ribbed structure underneath to reduce weight and tapped 10-32 holes in the side for cable attachment.

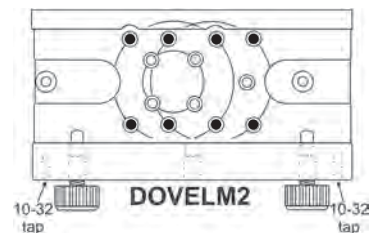

16" Dovetail Saddle Plate for Losmandy D Series Plates (DOVELM16S)

This Astro-Physics plate is no longer produced and has been replaced by the DOVELM162 below. If you already own one of these plates, and use a 17.25" or longer Losmandy DAP series (fits 6" and larger Astro-Physics refractors) plate, this mounting plate will work fine. SCTs, RCs and other instruments that are challenging to balance should use the DOVELM162 as shown below.




Note that the bolt-hole pattern is offset from the center. This allows you to position the plate either slightly forward or backward depending on the balance point of your telescope. Attach this plate with 1/4-20 x 1" socket head cap screws.

16" Easy-Balance Dovetail Saddle Plate for Mach1GTO, 900 and 1200 mounts and Losmandy D Series Plates (DOVELM162)

This Astro-Physics plate was introduced in February, 2009, and in mid-2010 we added the center clamp for even greater versatility. The DOVELM162 provides a multitude of mount attachment options, and was specifically designed to meet the balancing demands of "back-end-heavy" instruments like SCT's and Richey-Chrétien's, especially those with heavy imaging gear hanging off the back!

This plate has small knobs to avoid interference with the declination hub, but the knobs have cap screws in the ends that accept a 3/16 hex wrench for extremely secure clamping of your instrument. Additional features include ribbed structure underneath to reduce weight and tapped 10-32 holes in the side for cable attachment. This is the perfect saddle for our SBD16 16" Versatile Dovetail Plate!

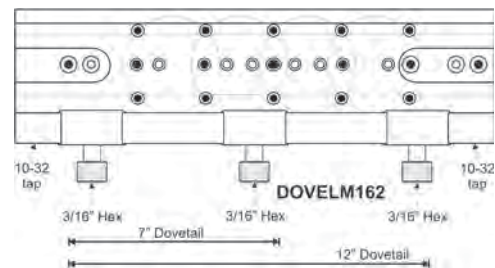


Note that the bolt-hole patterns are marked with scribe cuts. The four-hole patterns can all be supplemented with bolts along the optical axis in the six-hole pattern giving six attachment points at each position. Attach this plate with 1/4-20 x 1" socket head cap screws and possibly one 1/4-20 x 3/4" flat head socket cap screw (if at an end position).

Astro-Physics Dovetail Options

15" Astro-Physics Dovetail Saddle Plate (DOVE15) for 15" Sliding Bar (SB1500)

The 15" version of our dovetail plate is suited for the 130 f8 StarFire EDT, 155 f7 StarFire EDFS, ARO Maksutovs, Takahashi scopes and other instruments of similar size. The knob assembly features a brass pin with a tapered end to hold your sliding bar firmly without marring the aluminum. Use with the 15" Sliding Bar (SB1500), which is sold separately (**NOT** for use with Losmandy "D" or "V" plates or Vixen plates). Also makes a great accessory plate when used with any configuration employing the standard AP 13.75" ring spacing, including the SBD16, 900RP, 1200RP15, FP1500 or FP1800 (with rings mounted to inside holes).

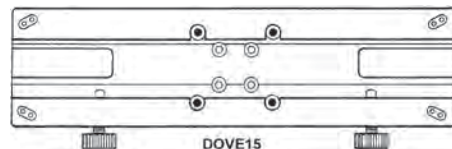

Attach with four 1/4-20 x 5/8 flat head socket cap screws.

8" ASTRO-PHYSICS DOVETAIL MOUNTING PLATE (DOVE08) with Q4047 ADAPTER



This versatile plate is suited for the 105 f6 Traveler and 130 refractors (we prefer the 15" Dovetail Plate for most applications of the 130 f8 StarFire EDT) and other short instruments. The knob assembly features a brass pin with a tapered end to hold your sliding bar firmly without marring the aluminum. Use with the 7" or 10" sliding bars (SB0800 or SB1000), which are sold separately. Repositioning the sliding bar will aid in adjusting the balance of your instrument.

NOTE #1: This plate requires the use of the Q4047 adapter with the 900GTO (or *Mach1GTO*) mount to provide clearance for the knobs.

NOTE #2: This is NOT a Vixen or "V" style Dovetail. The newer Vixen specification is slightly wider than our long established Astro-Physics 8" specification and has a much less angled bevel to the dovetail. A Vixen style plate (sliding bar) will not fit into this dovetail saddle. If you have a Vixen or "V" style dovetail plate on your instrument, please refer to the "12" Vixen Dovetail Converter (SBD2V)" on page 18 described below.

As an accessory plate - Attach to the top of our Astro-Physics mounting rings (tube diameters 5"-8") or rings from Parallax Instruments that have the Astro-Physics hole pattern (you can request it). Note, you must also use a sliding bar on the bottom of the rings with the same distance (6.3" from center to center), i.e. the SB0800 or SB1000.

Attach the Q4047 to the mount using the six outside holes and six 1/4-20 x 5/8" flat head socket cap screws. Attach the DOVE08 to the Q4047 with four 1/4-20 x 5/8" socket head cap screws.



Side-by-Side, Vixen Style and Other Plate Options

In general, we recommend side-by-side configurations more often for our two larger mounts. However, the 900GTO can handle a pair of small to mid-sized instruments in a side-by-side configuration. A nice pairing for a versatile visual setup might be a wide field refractor along with a Maksutov Cassegrain for high-power viewing. We never recommend using a side-by-side mounting as a guidescope / imaging scope setup due to the possibility of differential flexure.

13" and 16" Side-by-Side D Series Plates (SBD13SS & SBD16SS)

These plates will fit into any of the three D-series compatible plates listed above and will accept either the DOVELM2 or the DOVELM162 as the instrument saddle plates for each scope. The 13" plate allows optical axes to be placed on 9.5" (250 mm) centers, and the 16" plate allows instruments on 12.5" (318 mm) optical centers.

12" Vixen Dovetail Converter (SBD2V)

This 12" plate fills the void for those customers whose telescopes use the Vixen-style mounting plate including the Losmandy V-Series. Now there is no need to replace your existing Vixen-style bar, rings, or clamshell to accommodate your Astro-Physics mount.

The top portion is a female plate that accepts Vixen-style bars. In order to retain the tilt-in feature of the dovetail, the sliding bars must have an approximate width (at the widest point) between 1.65" (42 mm) and 1.8" (45 mm) and they must have a 75 degree bevel on each side. The bottom portion is a standard D-series dovetail that will fit into any of our D-Series compatible saddle plates.

Please note that we are not great fans of the Vixen style design. It is our belief that the 75 degree bevel does not provide an adequate safety margin for the clamps. We have not tested all plates that are currently available on the market. We recommend you check your plate for a good fit in this saddle without an instrument attached! Also, note that the top portion of this plate is NOT designed to be used with our SB0800, SB1000 or SB1500 sliding bars.



Other Mounting Plate Options

Additional mounting plate options including custom plates may be available from other sources. The hole patterns for the declination hub are shown on the illustration on page 16.

Attach Counterweight Shaft and Counterweights

IMPORTANT:

- Always attach the counterweights before mounting the telescope to the cradle plate to prevent sudden movement of an unbalanced tube assembly, which may cause damage or injury.
 - Remember counterweights are heavy and will hurt if they fall on your foot.
 - Use the Safety Stop!
1. Place the Delrin washer (part # F0020) onto the thread end of the shaft.
 2. Thread counterweight shaft onto the Dec. axis. Be careful not to cross-thread! Do not tighten too much, since you will need to remove it later.
 3. Remove the safety stop (a hand-knob and washer were provided on older mounts) from the end of the counterweight shaft. Add sufficient counterweights (5, 10 or 18 lb. counterweights are available) to the shaft to balance the telescope you intend to use. Loosen the counterweight knob and hold the counterweight with the knob pointing downward so that the brass pin will move from the center opening allowing the counterweight to slide into position. Always use two hands to attach or move them on the shaft. It is advisable to have the counterweight knob pointing down toward the pier. This will minimize the chance of accidentally loosening the counterweight during the observing session.
 4. **FOR YOUR SAFETY: Re-attach the safety stop to the end of the counterweight shaft.** This will help to prevent injury if someone accidentally loosens the counterweight knob.



NOTE: A firm tightening of the counterweight knob will not damage the surface of the counterweight shaft. The pin that tightens against the stainless counterweight shaft is constructed of brass. Likewise, the bronze sleeve that has been press fit into the center of the counterweight will prevent marring of the shaft as you move the counterweights up and down.

Attach Mounting Rings and Scope

(purchased separately)

Flat and ribbed plates: Our flat and ribbed plates are constructed with keyhole slots at the location where your mounting rings attach. This feature enables you to partially loosen the screws on your rings just enough to insert them into the larger part of the keyhole, then slide the rings to the narrow part and tighten them with a hex key. We prefer this keyhole method to the standard way of completely removing the screws and dropping them in the grass.

We suggest that you install the rings on the mounting plate, then open the rings, lift the scope in place, close the rings and tightened the knobs. To balance the scope, you can loosen the knobs enough to slide the scope forward or backward as needed.

Another approach is to attach the rings to the scope beforehand, then lift onto the mounting plate. However, the rings must be spaced exactly the correct distance apart to match the holes in the plate. This maneuver may be particularly difficult to accomplish with a large, heavy instrument and is not really something we normally recommend.

Dovetail plates or sliding bars: Attach mounting rings to the male dovetail plate (sliding bar) matching the appropriate threaded holes on the bottom of the mounting ring. Again, you have the option of attaching this dovetail/ring assembly to the mount and then lifting your scope in or placing the scope in the rings, then lifting the entire assembly to the female mounting plate already attached to the mount. Dovetail plate / sliding bar combinations are quick, versatile and convenient – hence their popularity. Simply loosen the knobs and “tilt” the sliding bar into place in the dovetail receiver. Once in place, tighten the knobs to lock everything securely. Loosen the knobs and slide the scope / rings / sliding bar assembly in the dovetail channel as needed to balance the system, and then re-tighten when balanced.

CLUTCH KNOBS, BALANCING AND FINE POLAR ALIGNMENT

Understanding the R.A. and Dec. Clutch Knobs

We suggest that you read this before assembling the remainder of your system.

1. What do they do?

The four R.A. and four Dec. clutch knobs depicted in the Assembly Diagram on page 6 have the function of connecting the R.A. and Dec. axes to their respective drive worm wheel gears. Their function is progressive, from no tension (axes free to move - as required during correct balancing of the telescope) to a completely "locked up" state.

2. How can you find out what they really do?

As shipped, all 900 mounts have both sets of R.A. and Dec. clutch knobs firmly hand tightened. This will give you a good idea of the maximum tightness (clutch action) that can be achieved by hand effort alone. At this point, you must bear in mind that for optimum performance all four clutch knobs on each axis (R.A. or Dec.) should be tightened evenly to the same tension i.e. all four half tight, all four fully tight, etc.

In order to feel the effect of the clutch knobs, you may wish to partially assemble your mount. Fit together the R.A. and Dec. assemblies plus mounting plate and counterweight shaft. Do not put scope and counterweights on at this stage. With the above assembly (with the clutch knobs firmly hand tightened - "as shipped"), you can feel the amount of force needed to move each axis by hand. Grab each end of the telescope mounting plate and move it with a backward and forward movement of the Dec. axis. You will feel considerable resistance to this motion. Perform the same operation on the R.A. axis by moving the counterweight shaft backward and forward. With a well-balanced telescope, the above tightness of the clutch knobs will be sufficient for all normal conditions of use.

Now, if you proceed to mount up and balance your telescope, you can "feel" what this resistance in R.A. and Dec. (movement backwards and forwards) is like when you make these motions from the eyepiece end of your telescope as you would during normal use when slewing (pushing) by hand to acquire an astronomical object within the field of view of your finder or scope.

3. How tight can the clutch be and can you do any damage by pushing against them?

The maximum tightness of this clutch system is 1/3 turn (with a 5/32 hex key) further in than the tension you can achieve with the knobs by hand. You will see that each clutch knob has a 5/32 hex socket for tightening with a hex key. With this extra 1/3 turn on each clutch knob, the axis (axes) will be considered completely "locked up" and you should not attempt to push your scope by hand against this "locked up" resistance, or undue stress will be placed on the worm wheel/worm and bearings.

However, if you are undertaking a very long astrophoto exposure, it is advisable to increase the pressure on each clutch knob (with the 5/32 key) by about 1/8 turn past hand tight on Dec. and 1/8th turn past hand tight on R.A. You may safely slew the scope by hand with this tension, however you will notice considerably more effort is required to achieve movement. This is the absolute maximum tension that can be used for hand slewing. As a general rule, if you have a big scope (7" or 8" refractor) with all the accessories, you will need more clutch tension than a 5" or 6" scope.

WARNING! Resist the urge to over tighten the clutch knobs with the hex wrench. This will only cause them to deform and lock into position. If you find that you are no longer able to adjust the tension and the knobs are locked firmly in place so that the axis will not move, please refer to the Clutch Plug Replacement Section at the end of this manual.

As a final note, There is not a single "right way" to use the clutches, just as there is no perfect all-purpose telescope. Here are some hints and guidelines:

- The longer and / or heavier the scope, the tighter you will want the clutches
- The more accurate the balancing, the less clutch tension that will be required
- Permanent setups will generally have tighter clutches than portable setups.
- Imaging setups will generally have tighter clutches than visual setups.
- Loosen clutches for transport to avoid putting any undue stress on the worm gear.

Balancing Your Telescope

For proper operation, the telescope must be adequately balanced along both axes. Start by balancing the tube assembly.

First, Balance the Declination Axis

1. Position the mount for balancing. Move the R.A. axis so that the counterweight shaft is pointing down. The declination axis assembly will be in the meridian (this is the classic photographic pose for a German Equatorial). Position the Dec. axis so the telescope tube is horizontal and pointing east.
2. Tighten the 4 R.A. axis clutch knobs.
3. Loosen the 4 Dec. axis clutch knobs (about 3/4 to 1 turn) so that the telescope moves freely about the declination axis. Be careful because if your telescope is significantly out of balance, it may swing rapidly in the out-of-balance direction!
4. Loosen the tube mounting rings and slide the tube back and forth for balancing. This is best done with the tube in the horizontal position. If you are using an Astro-Physics or Losmandy dovetail mounting plate, loosen the hand knobs on the female dovetail plate and slide the male plate and telescope to the desired position.
5. The scope is balanced when it stays put (does not move) with the clutches loose and movement back and forth about the declination axis has the same feel in both directions. Be mindful of eyepieces, cameras and other accessories that are yet to be added and compensate accordingly.

Second, Balance the Polar Axis

1. Now, tighten the declination axis clutch knobs and position the mount with the telescope horizontal and the declination axis horizontal. The counterweight shaft is now horizontal with the center of the counterweights the same height as the middle of the tube.
2. Loosen the R.A. clutch knobs. Again, be careful because if your scope is significantly un-balanced, it may swing rapidly in the out-of-balance direction.
3. Move the counterweight(s) up or down to achieve the correct balance in R.A. Again, movement back and forth about the R.A. axis should have the same feel in both directions.
4. Re-set the tightness of all 8 clutch knobs to the resistance you want making sure that each axis' 4 clutch knobs are evenly tightened. (See section on clutch knobs above.)

Try to anticipate any balance problems due to the extra weight of diagonals, heavy eyepieces, finders, solar filters, etc. If the scope moves by itself, when the clutches are loose, then the scope is not balanced adequately. You may want to "tweak" by carefully repeating steps 1 – 5 after everything has been attached to the telescope. Be especially careful loosening the Dec. clutch knobs.

NOTE: A small amount of imbalance on the East side of the mount is permissible and is considered by some to be desirable for astrophotography and imaging. It is not really necessary with the 900GTO because of the mount's high level of worm precision, but the practice is often touted in astrophotography guides, so we mention it here. Remember that if imaging several objects on different sides of the sky, you will need to re-adjust the balance to keep the east side slightly heavy after a meridian flip. This advice, then, obviously only applies to "hands on" imaging setups where you are physically at the mount to adjust the balance if needed. Remote imaging setups should aim for a balanced state. Roland never follows the practice of setting the east slightly heavy in his own imaging.

Polar Alignment – Part 2 – Fine Polar Alignment

For casual visual observation, you may skip this section and simply start observing. A finder-scope or single power finder may be required to locate objects since GoTo slews with the keypad require good polar alignment for spot-on accuracy. Don't forget to tighten your altitude locking knobs (2) and pier knobs (4 – Standard Pier Adapter and Hi-Lo Latitude Wedge only) before you begin! For casual visual observation, you can move the telescope manually via the clutches or by using the GoTo and centering functions of the keypad.

The keypad and GTO Servo Control Box will function as soon as they are plugged in. That means that the R.A. axis will be moving westward at the sidereal rate. Note, however, that this motion will not be accurate enough to qualify as "tracking" without accurate polar alignment. In short, if you will depend on the go-to functions of the 900GTO, or if you intend to do astrophotography, you must perform a more accurate polar alignment. Some methods, procedures and tips are presented below. You will complete this alignment when your scope and other equipment are mounted.

Methods for fine polar alignment

- **Polar Alignment Scope** – Our optional polar scope (PASILL4L or earlier models) will allow you to quickly align your mount on the pole stars. The reticle was designed for use in both the Northern and Southern hemispheres. Even users of the GTO computerized mounts will find these polar scopes useful, particularly if your telescope is not orthogonal to the mount (please refer to the keypad manual for a discussion of orthogonality). If you have a polar alignment scope, please read the instructions sheets that come with it. If you are planning long-exposure astrophotos or imaging, we suggest that you use the polar alignment scope, then tweak the final polar alignment by using traditional drift alignment, the Revised GTO Quick Star-Drift Method (our favorite!), or perhaps, PEMPro or CCDOPS™ from SBIG (as discussed below) or other similar alignment program.
- **GTO Keypad** – Please refer to the instruction manual for the GTO Keypad and read the sections from “Getting Started” through “Alternate Polar Calibration Routines & Tips.” Also, be sure to read the Keypad Addendum if there is one, as it may contain refinements to the keypad methods. As time goes on, the keypad manuals will be updated. Please refer to the Technical Support section of the Web site for the most recent documentation. Here are summary descriptions of several techniques for polar alignment from the current Keypad Manual and Addendum.
 - The Keypad startup routine provides two methods: The North-Polar Calibrate and the Two-Star Calibration. These two polar alignment methods were really designed for quick coarse alignment in the field with portable setups. They are most appropriate for visual observers. The Two-Star Method is generally the better of the two as it is less affected by orthogonality issues.
 - The Daytime Routine (See “Polar Aligning in the Daytime” in the Keypad Manual), is a great trick for daytime setup. In addition, it is the recommended first step in alignment for anyone in the southern hemisphere, and for owners of the 3600GTO. Even those in the south who own our polar scope will find it helpful, since it will generally put the rather difficult-to-spot southern stars into the polar scope’s field of view.
 - The original GTO Quick Star-Drift Method of Polar Alignment that takes advantage of the Meridian Delay feature of the Astro-Physics Servo System is also included in considerable detail in the Keypad Manual. A table of suggested stars is found in Appendix I of the manual.
 - Saving the best for last, we have also included a second **Revised** GTO Quick Star-Drift Method that was conceived for use with a finder scope. This method was introduced in the Keypad Version 4.17 Addendum and includes a one-page Quick Reference Sheet to use once you are familiar with the method. By using a finder scope, you are able to remove orthogonality issues from the process, making subsequent alignments much easier.

For our testing purposes here at Astro-Physics, using one of the first production 3600GTO’s, we obtained accurate enough polar alignment for extensive imaging (with a focal length of 3810 mm!) using the Daytime Routine, followed by the Revised GTO Quick Star-Drift Method, and did so in less than one half hour! The combination of Daytime Routine followed by the Revised GTO Quick Star-Drift Method is an excellent choice for anyone, anywhere. In addition, this combination is now our number-one recommended procedure for anyone in the southern hemisphere, or anyone who finds their view of the pole obstructed.
- **Computer Software Solutions** – There are many software packages that include aids to polar alignment. Some work better than others. Most of them have shortcomings, especially if there is any orthogonality error or flexure in your system. We have seen customers practically tear their hair out trying to get good alignment using software. Do not be fooled into thinking that your alignment is perfect simply because a piece of software told you so. Polar Alignment is, after all, entirely a mechanical issue. With the creation of the Revised GTO Quick Star-Drift Method, Roland and other staff members here at Astro-Physics no longer depend on software for polar alignment, although we do still take advantage of software’s capacity to speed up final critical drift alignment. Having said that, here are some of the software options that are available:
 - There is a Polar Alignment Wizard in the Full Version of PEMPro™ 2.x that is included with your 900GTO. This wizard is quick and easy and gives excellent results! Details are in the PEMPro™ documentation.
 - We suggest that you refer to detailed instructions in the GTO Keypad manual for a method that utilizes CCDOPS™ from Santa Barbara Instrument Group (SBIG) for precise polar alignment. This method is basically traditional drift alignment with CCDOPS™ and your camera precisely measuring the drift for you.
 - There are also other similar alignment procedures, including one in MaxImDL™ from Diffraction Limited. Numerous other software solutions are also available.
- **Star-Drift method** – Traditionally, this very time-consuming procedure has been regarded as the most accurate method of polar alignment. However, if you are using the old method of drift alignment that employs stars near the eastern or western horizon, you may encounter problems from atmospheric refraction, which will skew your alignment. To obtain more accurate results, choose stars somewhere near the celestial equator due south or slightly east and west, but not below 45 degrees elevation.

For portable setups, we believe that our two GTO Quick Star-Drift Methods (found in the keypad documentation as

noted above) are much more practical approaches in terms of providing highly accurate alignment and still leaving enough time to actually get some imaging done. A permanent observatory setup where long unguided exposures are taken may still benefit from a final tweaking using the traditional star-drift method (as modified by the 45 degree elevation recommendation above) or from a software enhanced variant that allows a CCD to measure and calculate the drift much faster than can be done at the eyepiece. The *PEMPro*[™] Polar Alignment Wizard is such a software solution.

- **Helpful Advice** – Members of the ap-gto Yahoo group occasionally discuss alternative methods of polar alignment that they have found helpful. We suggest that you participate in this Internet discussion group. Follow the links from the sidebar of our Web site to find the group.

Making Precise Altitude and Azimuth Adjustments

The mechanics of altitude and azimuth adjustment are relatively straightforward. In the discussion below, we will provide some information and tips that will give you the greatest success with your 900GTO regardless of the method you choose for determining the amount and direction of each adjustment. We'll leave the choice of method up to you. (Did we mention the Revised GTO Quick Star-Drift Method?) We list the fine altitude adjustment first because our Revised GTO Quick Star-Drift Method begins with altitude. Many texts for the classic star-drift method begin with the azimuth adjustments.

When you made your rough alignment earlier, you loosened everything up, got the mount close, and then tightened everything back down. Any minor shifting that occurred from locking things down tight was of no consequence since it was a rough procedure. Now you are fine-tuning the alignment. Regardless of whether you start with altitude or azimuth, begin the fine adjustment process with ***everything*** locked down as if you were already finished. Then, loosen only what is required to make the adjustment, and loosen as little as possible. Your final adjustment should always be with everything virtually, but not quite fully locked.

Fine Altitude Adjustment

Slightly loosen the two altitude locking knobs, but do NOT loosen the polar axis pivot screws. Move the polar axis up or down with the large altitude adjustment knob located in the front of the polar axis assembly. If lowering the axis, you may need to "help" the axis down if your lock knobs are somewhat tight. If you lower the axis, always be sure that the axis remains in firm contact with the brass thrust pad. The tommy bar can be positioned in any of the threaded holes located in the altitude adjustment knob. Use this bar for your final, very small adjustments to help you turn the knob. Please refer to the illustrations earlier in this manual if you are unsure about these parts. It is also possible to make fine altitude adjustments by using the turnbuckle on the north leg of our pier, if used.

One full turn of the altitude knob is approximately 0.64 degrees (38 arcminutes). There are 30 dimples on the altitude knob giving approximately ~ 1.266' or 00°01:16 per dimple.

You must be locked down in azimuth before making your final altitude adjustments, even if you will be loosening up a bit to tweak the azimuth after the altitude is finished. It is especially important that the rear azimuth lock-down knob be tightened fully so that the mount base is incapable of any slight forward tilt during the final altitude adjustments.

Tips for Adjusting the Altitude

1. The mount's polar axis is held in place between the two side plates. It is possible for the mount to shift slightly when the locking knobs are fully tightened down after adjustment of the altitude angle. To prevent this shift, it is suggested that the initial fine altitude adjustment be done with these knobs hand snugged, and as you approach the final adjustment point, tighten the knobs, first to hand tight, and finally with a hex key after each small movement. As you converge on the pole in altitude, each successively smaller adjustment is made against greater resistance from the ever tighter lock knobs.
2. Approach the pole from below and try not to overshoot. If you accidentally move the axis too high and overshoot the altitude angle, it is better to loosen the two lock knobs a bit, and bring the axis back down a very small amount before proceeding back up with the knobs tightened up again. This way you are using the weight of the mount to insure a solid connection to the altitude adjuster. During the final "tweaking" adjustment phase, with the locking knobs quite tight, screw the Tommy bar into one of the holes in the altitude adjuster knob. This bar can then be used as fine adjustment tool and is a good indication of the position of the axis.

Fine Azimuth Adjustment

When designing the Heavy-Duty Azimuth Adjusters for both the 900 and 1200 mounts, we debated using an azimuth adjuster with a single captured threaded rod passing through a stationary azimuth block to avoid the two step process of backing off one side, and then adjusting the other. However, we found that the inevitable backlash in this type of system

made adjustment more problematic and less precise.

The one-piece Azimuth Adjustment assembly makes for easy and accurate polar alignment in your observatory or in the field, and it eliminates issues of adjustment backlash. The heavy-duty construction and integrated one-piece design result in smooth control of the azimuth axis. Large left and right adjuster knobs are graduated for precise control of azimuth position angle.

One full turn of the azimuth knob is approximately 0.63 degrees (38 arc minutes) Each long registration mark is about 7.6 arc minutes; each short mark is about 1.5 arc minutes.

The size of the knobs makes them easy to turn with very little torque required, even with the mount fully loaded. Take full advantage of the graduation marks on the Azimuth Adjuster when performing fine alignment to mark your starting and ending points for each adjustment. This will allow you to exactly undo any adjustments that are made in the wrong direction. Do not leave the knob you have backed off loose. When finished, both knobs must be tight against the azimuth adjuster block to hold the azimuth angle you have set. If you follow our hint below, the act of adjustment will leave the adjusters tight against the azimuth adjuster block!

****Important Hint:** The natural tendency when making azimuth adjustments is to first back one adjuster knob off a significant amount, then make the required azimuth adjustments with the other knob, and then when finished, to tighten the first knob back up against the azimuth block. This can result in a slight shift as the first knob is tightened against the block.

We recommend that you completely abandon this approach for fine azimuth adjustment. Instead, start with both knobs tightened against the azimuth adjuster block. Then, **back off the first knob only by the small amount of the adjustment you plan to make.** Use the graduated markings on the knob to mark your starting and ending points. For example, if you are already pretty close, you might try backing off just two small graduations, or roughly 2 arcminutes. Finally, make the actual adjustment by tightening the other knob thereby making the tiny adjustment you required and eliminating any shift because everything is already tight when you are finished. By using the graduations, you can easily undo any errors or estimate the magnitude of your next adjustment.

The procedure for making azimuth adjustments is somewhat different with the Precision-Adjust Rotating Pier Adapter (900RPA), Standard Pier Adapter (900SPA) and Hi-Lo Latitude Wedge Assembly (900WDGA) as discussed below. If you are using your own pier adapter or one provided with the Particle Wave Technologies Monolith Pier, there may be additional considerations to achieve smooth, accurate adjustments.

Precision-Adjust Rotating Pier Adapter with Azimuth Bearing (900RPA)

The Precision-Adjust Rotating Pier Adapter consists of two plates that allow ultra-smooth adjustments for critical polar alignment. When using the Precision-Adjust Rotating Pier Adapter, tighten the pier knobs fully by hand. It is not necessary to use a wrench, but you want the pier knobs at their final level of tightness before you start adjusting. These will remain tight during and after the adjustment procedure. Also please note that the altitude axis should be fully locked down with a hex key before adjusting the azimuth.

Azimuth adjustment is accomplished with the two fine azimuth adjustment knobs, one on each side of the mount. Make your azimuth adjustments as described above and be sure to take note of the Important Hint! When your azimuth angle is perfect, you are finished. There is nothing further to tighten or to lock down, and you don't need to worry about the dreaded shifting that inevitably follows such lock-downs. Follow one of the alignment methods discussed above in the Polar Alignment section.

Notice the two setscrews on the side of the Precision-Adjust Rotating Pier Adapter. These setscrews are used to apply tension to the rotating plate. You may, on rare occasions, need to adjust these setscrews to gain the proper feel during the adjustment process. If you notice a slight amount of shift, particularly with a larger scope, carefully tighten the screws a small amount. DO NOT overtighten! If you find too much resistance, the screws may need to be loosened slightly. (See pier adapter section earlier in manual.)

Standard Pier Adapter (900SPA) and Hi-Lo Latitude Wedge (900WDGA)

Each of the azimuth lockdown knobs has a hardened washer. With these washers, the lockdown knobs can hold the mount down tight while still allowing the axis to be easily adjusted with your fingers turning the large knobs of the Heavy Duty Azimuth Adjuster. These washers will eliminate minor shifts in the axis when you are tweaking your azimuth adjustment.

Note: The washers have a sharp-edged side and a rounded-edge side (the difference is subtle). Place them with the sharp edge of the washers facing **Up** toward the knob, rounded edge down onto the painted surface of the base plate. If you install the washers with the sharp edge down, they will bind into the paint and prevent smooth movement. If you do not have a permanent installation, you may wish to mark the down side of the washer with a permanent marker so that you can

quickly identify the desired orientation.

1. The altitude axis should be fully locked down with a hex key before adjusting the azimuth.
2. Follow one of the methods of polar alignment mentioned above.
3. During the initial adjustment phase, the front and two side lock-down knobs should be hand snugged only. The rear knob should be relatively tight. This will allow easy movement of the azimuth axis.
4. Make your azimuth adjustments as described above and be sure to take note of the ***Important Hint on the previous page***. When you are close to the final position of the azimuth axis, use a hex key to lock down the rear knob only. The azimuth can still be moved with the adjusters, but it will now be solidly connected to the pier top. The other knobs should remain hand-tight. The weight of the mount and scope puts pressure on the front of the plate for a solid connection, so it is not necessary to lock them down fully with a hex key until all adjustments are finished.


Azimuth Adjuster Knob Locking Screws:

A pair of locking set screws with Nylon tips has been added to the design of the azimuth adjuster block to facilitate those customers who may have a permanent pier in an unprotected location. This way, you can easily take the mount indoors between uses without ever losing your accurate polar alignment. To do this, you should tighten one or the other (not both) of the locking screws so that the adjuster knob on that side is locked into place. (It does not need to be extremely tight – just tight enough that the knob will not be turned by ordinary handling.) Then loosen the other knob so that the mount may be removed from the pier adapter. When returning the mount to its pier simply rotate the mount by hand until it rests the locked side against the azimuth adjuster block and tighten the loose knob until it is also snug against the block. You now have your azimuth adjusted once again.

If you will not be needing this feature, it is best to leave the set screws at or slightly below flush with the top of the Azimuth Adjuster body. The Nylon tips of the screws should not be in contact with the fine-thread rod of the Azimuth Adjuster knob. Do not use these screws to “tighten” the feel of the azimuth adjuster knobs. You will not gain anything, and you will damage the screws’ Nylon tips.

CABLE MANAGEMENT

The movement of the mount across the meridian during slewing functions is calculated so that the cables will not tangle if they are set up properly. In addition to the motor and power cables that are provided with the mount, you may have additional cables for other accessories. These may be powered from the GTO Control Panel or from another power source. We suggest that you position your cabling carefully to avoid a tangled mess. When your cables are set up, move the telescope manually throughout the normal range of movement to be sure that the cables do not catch on anything and that you have enough length. Here are a few pointers:

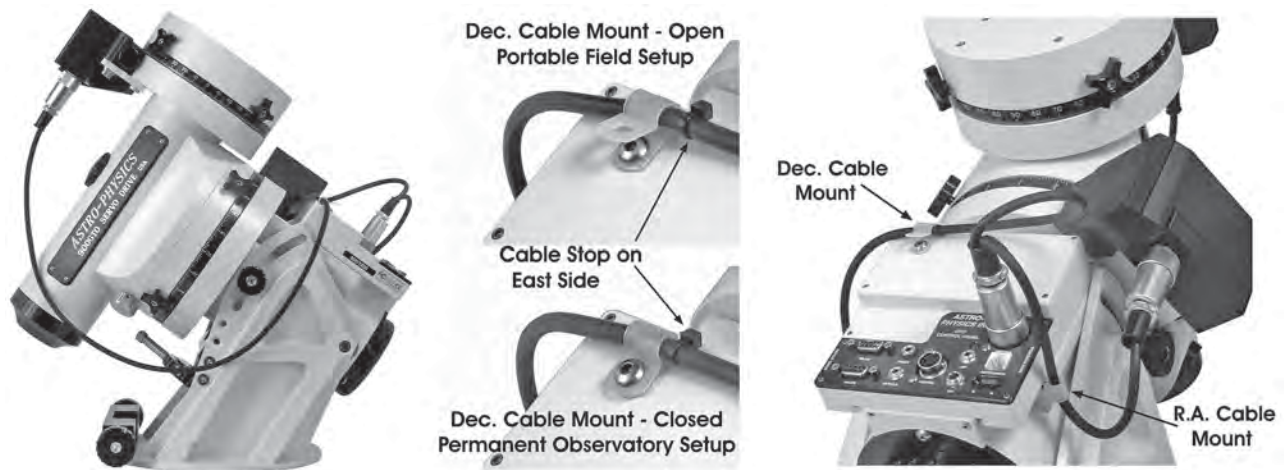

900 Motor Cables


Note that the Y-cable for the 900 mount originates at the GTO Control Panel connector, and then splits into two. The short portion connects to the R.A. motor box and is not likely to be in the way because this axis remains in the same position. We have provided a cable mount to position the Dec. cable neatly. The longer Dec. portion of the cable must be set up properly to ensure that as the Dec. axis moves, the cable follows smoothly. Please insert this cable into the cable mount in the upper left corner of the GTO Servo Control Box as shown above. When the connector is attached to the Dec. motor box, the cable should be positioned as shown in the photograph.

Accessory Cables


Accessories may include Kendrick Dew Removers, CCD cameras and autoguiders, focus motors, illuminated guiding eyepiece reticles, power cords for the Pentax 6x7 camera, etc. As you attach each accessory, carefully assess the best position to assure complete movement as your telescope slews from one side of the mount to the other. If an external power source is used, determine the optimum location for the battery. Beginning in 2007, we have supplied a half-dozen nifty Velcro cable-ties to assist you in this important and often overlooked little housekeeping chore. Use the cable-ties to secure your various cables to the mount, telescope, rings or to bind them together. Adhesive cable mounts similar to the one that we use for the Dec. cable are also an alternative choice. We prefer to use the Velcro cable-ties since we cannot bear to attach adhesive cable mounts to our beautiful telescopes or mounts.

Optional Accessories to Prevent Cable Snags

Those of you with permanent installations may wish to consider replacing the clutch knobs and dovetail knob on the side with the declination cable with our Modified R.A. Clutch Set Screws (part # F0021) and a Replacement Assembly for 900/1200 Dovetail Knob (part # DOVEKBREP). Note that these optional items are available for purchase on our Web site or by calling Astro-Physics.

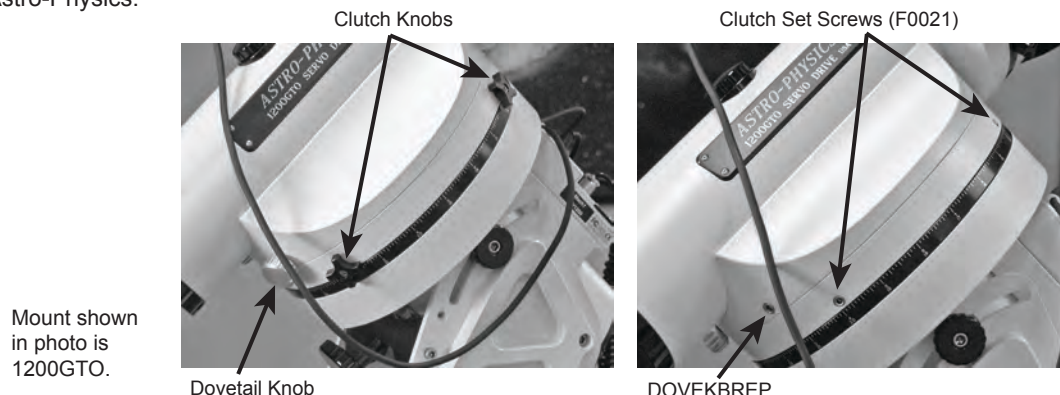

Example from International Space Station – Amateur Telescope (ISS-AT) Project

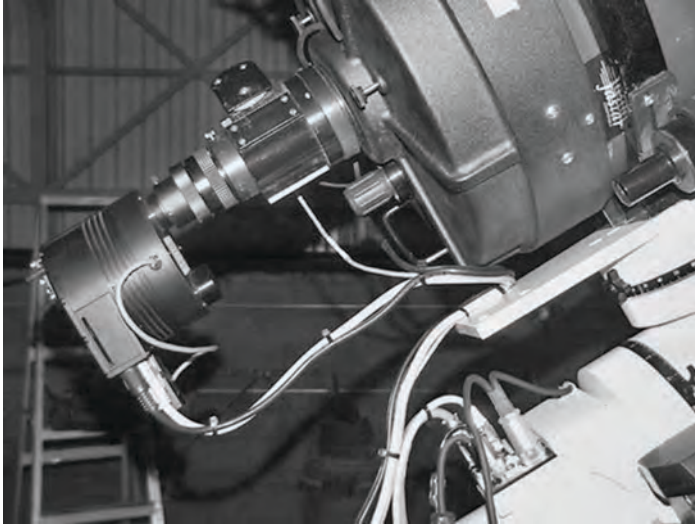

If we use tie wraps to secure several cables together and plan to use that same setup in our next observing session, we keep the ties in place when we disassemble our equipment. The setup for the next session is much quicker.


The photo on the left shows how the cables were arranged on the 1200GTO that was installed at a permanent observatory for the International Space Station – Amateur Telescope (ISS-AT) project of the Astronomical League. This mount was operated remotely and cable management was essential. The scope was a modified Celestron C-14 and the accessories included: CCD camera, color filter wheel, remote focuser and Kendrick Dew Remover.

Note how the wire bundle is attached to the mounting plate before looping back to the pier. Attaching the wires securely to the plate prevents any kind of motion or disturbances to the camera during image acquisition and

guiding. The loop is made long enough to allow the scope to reach all portions of the sky with plenty to spare. The people who installed the system ran the scope all over and reported zero interference.

This photo shows the mount and scope with the wire loop containing all the cables from the CCD camera, color filter wheel, remote focuser and Kendrick Dew Remover. If you look closely, you will notice that the two clutch knobs were removed and replaced with special Allen head clutch set screws. This allowed the Dec. cable to slide easily over the axis in all orientations and there was no snagging of the wire anywhere. Please call Astro-Physics if you would like to order these bolts. Do not try to install normal Allen head bolts.

For a portable setup, we keep the ties wraps in place as much as possible when we disassemble our equipment. The setup for the next session is much quicker.

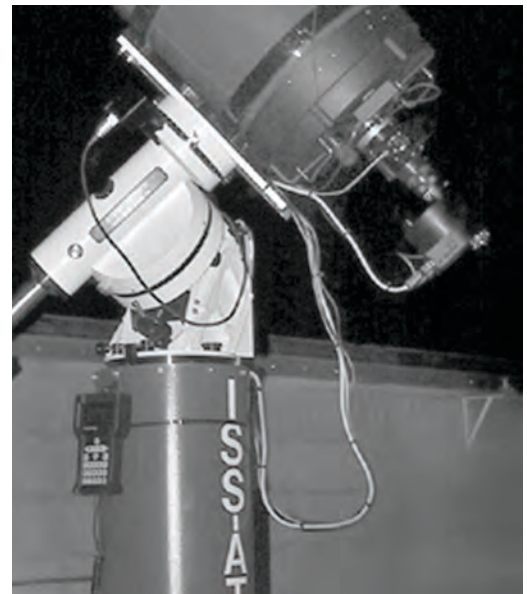

Please Note: As an additional aid to cable management, the current production models of the DOVELM2 and DOVELM162 Dovetail Saddle Plates for Losmandy “D” Series Plates feature a #10-32 tapped hole at each end to facilitate the attachment of a cable stay. See the previous section on attaching mounting plates.

MOUNT CARE, CLEANING AND MAINTENANCE

Like any fine piece of equipment, your mount's longevity and performance are directly correlated with the quality of the care that you give it. Handle it with respect, keep it as clean and dry as is practical, and perform a few minor maintenance tasks, and your 900GTO will give you many years of trouble free service.

Care

Although we build it to be rugged enough for field use, your 900GTO is a precision instrument with very accurate worm and wheel adjustments. Please be careful if you place the mount on a flat surface, i.e. the ground or trunk of your car. The gear alignment may be affected if the R.A. and Dec. motor/gear box assemblies sustain undue lateral force. This is true of any fine instrument. We suggest that you transport and store the mount in a case or in a well-padded box. ALWAYS disassemble the mount before moving it or transporting it. More damage can be done in a few careless seconds in transit than in many hours of normal operation.

Try to keep your mount protected from dust and moisture when not in use. In warm, humid weather, be aware of the dew that may have formed on the mount while in the field and allow the mount to dry out before packing it away for storage once you get home. On the other hand, if it is cold and dry outside, keep the mount packed up when you bring it into the house until it reaches room temperature to avoid "fogging it up." (The same advice applies to telescopes, eyepieces and other equipment in your Astro-arsenal.)

Cleaning and Touch-up

Wipe your mount clean with a soft dry cloth. If needed, you can use a damp cloth or a cloth that has been sprayed with a mild, non-abrasive cleaner (window or all purpose cleaner – no bleach). Do not spray cleaners directly onto your mount. If you use a cleaning product, follow with a damp cloth to remove the chemicals from the mount.

The painted surfaces of your mount may end up with scuff marks from repeated transport and assembly / disassembly. Most of the time, these marks can be removed with a product like [Color Back](#) by [Turtlewax](#) (automotive product). Simply apply with a paper towel and buff out the mark. If your paint becomes chipped, touch-up kits are available for purchase – please call us.

NOTE: Paint touch-up kits can only be sold to U.S. customers because of regulations governing shipment of hazardous materials.

Routine Mount Maintenance

Under normal operating conditions, minimal maintenance is required. Every 12 months the clutch knobs (4 for Dec. and 4 for R.A.) should be removed and 1 small drop of light oil (3 in 1 household oil) should be put in the exposed hole. If the R.A. and Dec. axes are attached together for a long time in outside conditions (i.e. in a permanent observatory) then the mating surfaces should be lightly oiled or greased - if you expect to get them apart again after 10 years.

Jostling and vibrations associated with transport to and from observing sites has had the effect of causing screws and fasteners to work their way loose over time. We have worked very hard in both the design and assembly of our mounts to alleviate this problem, but it is still a good idea to periodically (once or twice a year) inspect and if necessary re-tighten any easily accessible fasteners. Additional maintenance information can be found below in the troubleshooting section and in the Technical Support Section of our Web site.

TROUBLESHOOTING, TIPS AND SUPPORT

Troubleshooting and Tips

Additional troubleshooting questions are in the GTO Keypad manual. Some of the issues discussed in the keypad manual relate to mount communication issues whether you use the keypad or control the mount with a planetarium program or *PulseGuide*™. Please refer to them.

The Declination (or R.A.) axis is fairly tight, even with the clutch knobs fully loosened.

This occurs when the clutch plugs have been damaged from over-tightened clutch knobs. Please refer to the sections at the end of this manual for detailed instructions on clutch plug removal and how to fabricate your own clutch plug tool.

For polar alignment, I am using declination drift technique with stars on east & south. Now, I do not see any drifts in declination on both sites (E & S), so the mount “should” be properly aligned. However, I have still small drift in R.A. which looks like the R.A. motor is a bit faster than earth rotation. This drift is something like 1.5 arcsec. during 1 minute or so & accumulates over time, so it doesn’t look like periodic error.

The sidereal tracking rate is exact in the mount (it is crystal controlled and checked here for accuracy). However, the stars do not move at exactly the sidereal rate everywhere in the sky. The only place they move at that rate is straight overhead. As soon as you depart from that point in the sky, the stars will be moving more slowly, especially as you approach the horizons. Thus, it looks like the mount is moving slightly faster than the sidereal rate. Just because you have done a classic drift alignment, does not mean that the stars will now be moving at the sidereal rate everywhere in the sky.

In order to increase the area of sky from the zenith that will give you fairly good tracking, you will need to offset the polar axis by a small amount. The amount will depend on what your latitude is. The other approach is to vary the tracking rate for different parts of the sky. Ray Gralak's *PulseGuide*™ will allow you to dial in an exact tracking rate for any part of the sky.

The Astro-Physics Command Center (APCC) includes tracking and pointing correction based on calculations from atmospheric refraction all the way up to sophisticated real-world models based on plate-solve data for your specific instrument package.

Initially, the mount was working fine. Then, suddenly the mount stopped tracking altogether!

Chances are that the motor was turning properly and driving the worm gear, but that your clutches might have been loose and therefore the scope was not following the motion of the worm gear. The fact that the high slew rate did move the scope does not change this, because Roland has seen this himself where the tracking rate did not overcome the slipping clutches but the slew rate did.

If you are unsure of the motion of the motor, just remove the motor cover plate and look inside. You will see the motor turning. Sometimes when you have the clutches loosely engaged and the counterweights are somewhat out of balance, being heavy in the east, then the clutches might slip at the slow sidereal rate.

In any case, just to set your mind at ease, simply remove the motor cover next time something like this happens and look at the motor shaft. If the motor is not turning, you will have some kind of electrical problem. If it is turning, then it is mechanical.

The declination axis does not appear to be moving properly. How can I check it?

Please refer to page 36 for the instruction sheet: “Characterizing the Dec. Axis Motions,” which explains how to use Diffraction Limited's *Maxim DL*™ software to characterize your mount's performance.

When I press the E button on my keypad, it takes forever for the star to finally stop. Adjusting the backlash control using the keypad helped, but the problem is still there.

First, the problem is most often caused by the worm and worm wheel not being in mesh (this is often the case when a used mount is purchased and the previous owner never ever adjusted the worm mesh or the mesh was altered during shipment). When the worm is out of mesh, it takes the motor many seconds to reverse the tooth contact from leading to trailing edge because it is running at the very slow sidereal rate. One could simply dial in an appropriate amount of R.A. backlash into the keypad in order to compensate for this. R.A. backlash compensation simply kicks the motor momentarily in the opposite direction at high speed until the opposite teeth have made contact and sidereal tracking can take place. The ideal solution is to adjust the worm backlash so that this delay does not occur. Please refer to the detailed information in the technical support section of our Web site.

I am experiencing trailed stars after a slew and apparently a high, variable backlash.

Check to make sure that the spur gear that is attached to the end of the worm is not loose. A loose screw will indeed cause the axis to delay during reversal. In a few cases, we have seen that the set screw on this spur has backed off and needs to be retightened. If you have any doubts about where this worm and spur gear is in the scheme of things, call Astro-Physics and we will talk you through the procedure to check this.

Remember this: Any backlash or looseness in Dec. will NOT cause trailed stars after a slew. That is because the Dec. axis does not move once it gets to its new position, so no trailing is possible. So, if you are getting trailed stars for a short time, don't look for something in the Dec. axis.

However, the R.A. axis WILL cause trailed stars after a slew if the spur gear is loose. That is because this axis must move at the sidereal rate immediately after getting to the new position. If the spur gear is loose on the worm shaft, it will turn slowly at the sidereal rate without imparting this motion to the worm itself (because it is slipping). At some point, the set screw will catch on the edge of the flat on the worm shaft and begin to drive the worm gear. So, this looks like classical backlash, when in fact it is not backlash at all, and all attempts at setting the gear mesh on the worm are futile to correct this lost motion.

When we get a chance, we will post a complete set of pictures on our web site showing how to check for this loose gear condition. Meanwhile, you can take the cover off the motor gearbox and acquaint yourself with the spur gears inside. Do not be afraid to move and wiggle things by hand to see how stuff works.

One more thing, sometimes a person will be absolutely certain that it is the Dec. axis that is giving him a problem because the CCD program he is using shows some improper function in the Y-axis, and he is absolutely certain that $Y = \text{Dec.}$ After much sending of equipment back and forth to our facility, it finally is determined that it was the other axis after all that had the problem. PLEASE, please make sure that you have identified the proper axis. In the case of any kind of motion problem like this, it would be really helpful if you removed your camera, inserted an eyepiece with crosshairs and actually looked to see what was happening. You can then identify exactly which direction, R.A. or Dec., is moving after a slew. Sometimes because of mix-ups in the CCD software (*MaxImDL*™, for instance), the axes are identified backwards.

When you are trouble shooting, remember, R.A. is the only axis that must move at the sidereal rate and is the only axis that can trail a star if it is not moving correctly at that rate. The Dec. axis does not move after a slew and will not trail a star except by a very slow long period drift due to polar misalignment, etc. It will not trail a star image EVEN if it has 10 degrees of backlash, so that analysis is definitely suspect.

I'm having a frustrating guiding problem with my mount and need to figure out my next steps.

To begin with, the directions represented by the X+, X-, Y+ and Y- in your guiding software do not necessarily correspond to any given cardinal directions. To the guiding software, "X" and "Y" simply refer to the rows and columns of pixels on the guide chip – nothing more.

The act of calibration tells the guiding software how to relate a guide star's drift along the columns and rows to move directions in the mount, but it does not make it so that X is necessarily always right ascension and Y always declination. To further complicate this, each time you alter the camera's orientation, you effectively change the relationship between X / Y and R.A. / Dec.

Your very first step in diagnosing any type of guiding problem should be to determine the actual current relationship between the X and Y of the guiding software and the R.A. and Dec. of your mount. This is easily done in your guiding software by making a manual move in one axis during an exposure and comparing this to a guide move from the keypad (use the keypad – not your computer software!) where you know the axis and direction for certain.

We have seen customers waste countless hours (not to mention dollars) in trying to fix a guiding problem on an axis that was performing perfectly. Meanwhile, their true problem remained, all because of this axis mix-up.

Your next step would be to remove the camera and place a high power eyepiece with crosshair reticle into the focuser. Then sit down and watch what happens to the guide star. With the eyepiece and reticle, you can see whether or not the mount is tracking smoothly and how the periodic error is manifesting itself. Yes, you will have periodic error, and any good CCD camera will pick it up to give you oval stars - that is a given. What you need to find out is whether this periodic error is within limits (+/- 3.5 arcseconds for the 900GTO and +/- 2.5 arcseconds for the 1200GTO) and whether it is smoothly varying. You can also do some hand guiding using the 4 buttons on the keypad. It will tell you how responsive the mount is to your guiding inputs and may even show some hidden problems when you try to keep the star on the crosshairs.

Alternately, you can use *PEMPro*™ (The full version of *PEMPro*™ is included with the 900GTO) to characterize your periodic error. It will tell you things like the peak value and the smoothness of the error.

You can also characterize your mount tracking and guiding abilities using the "Characterizing the Dec. Motions" test outlined in the Technical Support section of our AP Web site and included in the back of this manual. Many times a problem guiding in R.A. can be the result of a Dec. axis mechanical problem. Not knowing this, you will be forever chasing down the problem on the R.A. axis, and never reaching a solution. Characterizing your Dec. Axis will at least show you that the mount reacts properly to the 4 guide directions. If it shows a problem area, then at least we will know how to fix it.

Once you know that the mount is tracking in a normal fashion with normal periodic error profile, you can go from there to begin setting up your guiding parameters. It is not a piece of cake to get a guider like the ST4 to work flawlessly. It is an art, but once you know that the mount responds properly to the guide inputs, it should be possible to set it up to work accurately.

Additional Support

For additional information regarding the 900GTO, refer to the Technical Support Section of our Web site. We also encourage you to participate in the ap-gto user group. The members of this group are very knowledgeable about the operation of their mounts, CCD imaging and other related issues. The staff of Astro-Physics also participates and you will find a wealth of information in the archives. To find the group, link from User Groups in our Web site's sidebar.


If any problems occur, please don't hesitate to contact Astro-Physics for assistance.

We encourage you to submit your technical support questions directly to Astro-Physics by phone or e-mail: support@astro-physics.com.

We may add additional troubleshooting tips to future versions of this manual or in a separate technical document. In such an instance, we would add this information to the Technical Support section of our Web site as well.

ASTRO-PHYSICS, INC
11250 Forest Hills Road
Machesney Park, IL 61115
Telephone: (815)-282-1513
Fax: (815)-282-9847
support@astro-physics.com
www.astro-physics.com

STANDARD PIER ADAPTER OF THE 900GTO MOUNT

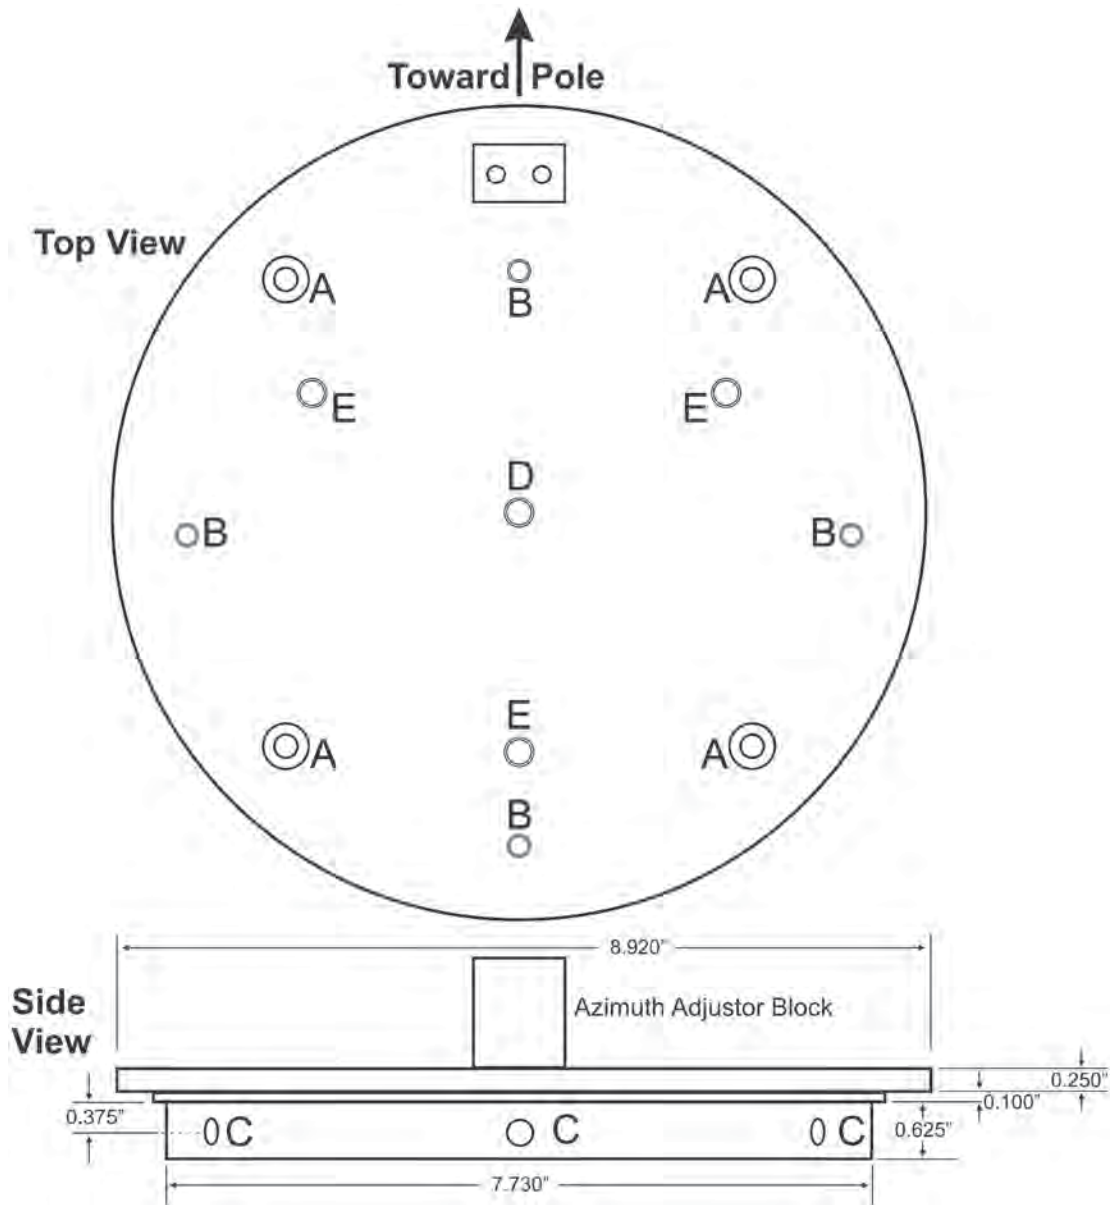

The 900 series mount is designed to fit into our 8" outside diameter pier which is available in several heights. The Standard Pier Adapter for the 900 mount shown above fits into the post (aluminum tube) of the pier assembly and is secured with six (6) 5/16-18 screws at the location marked C.

If you want to make your own pier, you can either use these six side holes marked C or you can use the four countersunk through-holes marked A located on the top of the plate. You can also drill additional countersunk holes to fit your specific requirements.


- A. Countersunk through-holes for 1/4-20 cap screws. You can use these four (4) to attach the mount to a flat surface. The bolt circle radius is 3.615".
- B. The Polar Axis Base Assembly attaches to this pier adapter with the four Pier Adapter Knobs at these locations.
- C. These six (6) 5/16-18 threaded holes are spaced every 60° on the circumference.
- D. The special screw that is installed at this location, the Center Pivot Screw, is required to keep the mount perfectly centered during azimuth adjustments. This screw **MUST** be installed. **DO NOT** remove it! (Part # M12330M)
- E. These three (3) holes are tapped 5/16-18 on a 2.620" radius bolt circle. They allow you to attach our Tripod Adapter (ADATRI) for the 400, 600 or Mach1GTO mounts to your 8" pier.

USEFUL DIMENSIONS FOR OBSERVATORY PLANNING

People often ask us what the 900GTO's dimensions are. The answer is: It depends. Different latitude settings can drastically affect the shape and dimensions of the mount. To answer this question we have prepared the following diagram. Your PulseGuide™ CD also has an Excel spreadsheet for calculating these and additional dimensions for your own latitude and system. Note: The photos below show the 900GTO with an older version of the counterweight shaft.

ASTRO-PHYSICS 900GTO GERMAN EQUATORIAL MOUNT

10/04/05

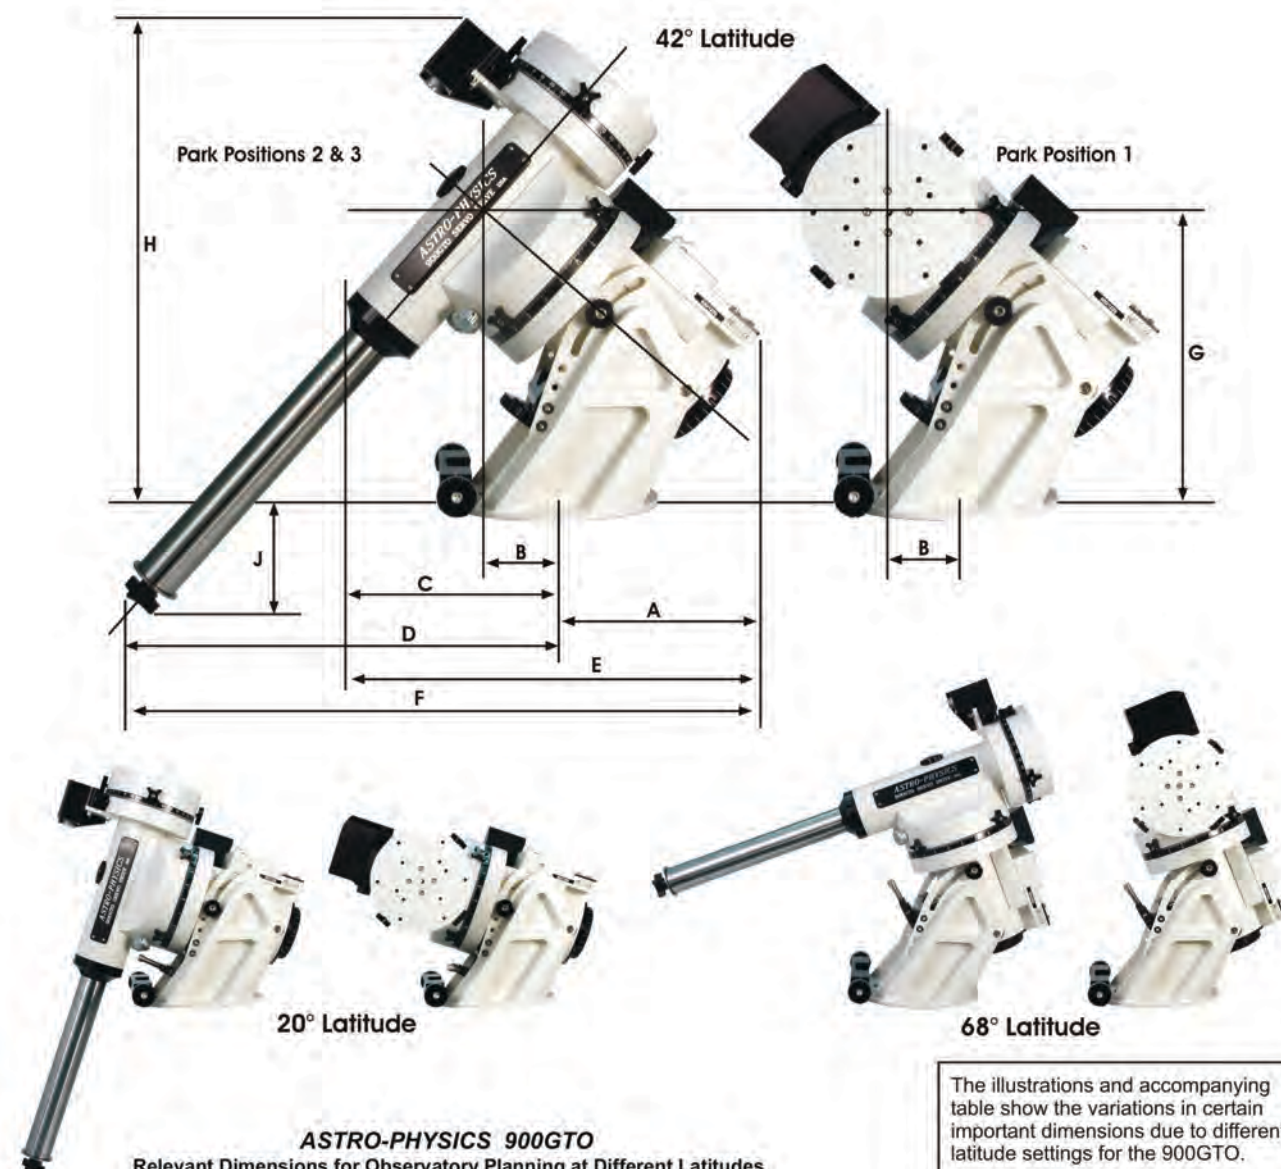

ASTRO-PHYSICS 900GTO Relevant Dimensions for Observatory Planning at Different Latitudes					
Dim.	From:	To:	20°	42°	68°
Horizontal dimensions					
A	Center of Baseplate	Back of Mount	6 7/8"	8"	8 3/4"
B	Center of Baseplate	Center of Dec. Axis	4 3/4"	2 1/2"	-1"
C	Center of Baseplate	Front of Mount	8 7/8"	8 1/2"	5 7/8"
D	Center of Baseplate	End of Counterweight Shaft	12 5/8"	17 1/8"	18 3/4"
E	Front of Mount	Back of Mount	15 3/4"	16 1/2"	14 5/8"
F	End of Counterweight Shaft	Back of Mount	19 5/8"	25 1/8"	27 1/2"
Vertical Dimensions					
G	Bottom of Baseplate	Center of Dec. Axis	8 1/4"	11 3/4"	14 3/8"
H	Bottom of Baseplate	Top of Mount	15 7/8"	19 3/4"	21 3/4"
J	Bottom of Baseplate	End of Counterweight Shaft	-11 7/8"	-4 1/4"	6"

The illustrations and accompanying table show the variations in certain important dimensions due to different latitude settings for the 900GTO.

These measurements may be useful for determining clearances when designing an observatory or deciding on an appropriate pier height.

The 900's latitude range is from 20° to 68°. The main image shows a mid-latitude setting of 42° (the latitude at ASTRO-PHYSICS). The smaller images show the mount set at 20° and 68° for comparison.

Horizontal dimensions will be the same for all 900 mounts. For mounts with older style fork assemblies, subtract 7/8" from the vertical dimensions.

CLUTCH PLUG REPLACEMENT FOR 900 OR 1200 MOUNT

Who needs clutch plug replacements?

If the clutch knobs of your 900 or 1200 mount are tightened down with excessive force, the plugs under the knobs may deform and splay out. This will cause your mount to feel very stiff and you will be unable to back off the pressure of the clutch knobs. Once this happens, the clutch plugs need to be replaced.

We have developed a tool, part #M0100, that will successfully remove the clutch plugs so that you can install new ones. If you prefer to make your own tool, we offer instructions in the Technical Support section of our Web site.

The part number of the clutch plugs is M12665-A. Please do not try to substitute your own clutch plugs since incorrect dimensions or composition of the material can impair the performance of your mount.

What you will find in this package:

- A special screwdriver that has been modified by Astro-Physics, if you ordered it. This screwdriver is marked with masking tape. DO NOT REMOVE this tape. Instructions for making your own tool can be found below and in the Technical Support section of our Web site.
- Replacement clutch plugs (M12665-A).

What you will need:


- ½ to 1 pound hammer
- A light machine oil (example: 3 in 1)

Replacement of “old” Clutch Plugs


Removal of the old plugs will be done by, “hammering” the special “screwdriver” into the old plug. This will create a “driving” slot for the “screwdriver” blade.

Please follow the steps below.

- Remove the clutch knob from the clutch plug hole.
- Insert the screwdriver into the clutch plug hole and press down firmly (make sure the guide point on the screwdriver is fully engaged in the center hole of the “old” clutch plug).
- Sharply hammer the screwdriver so as to drive its’ blade about 3/16 of an inch into the old plug. The masking tape on the screwdriver shank will provide a good reference for this 3/16” depth. The tape will be “level” with the top of the clutch plug hole when the correct depth has been achieved (see the illustration below).
- Maintaining a positive downward pressure, turn the screwdriver in a counter clockwise direction. This will cause the old clutch plug to “unscrew” from the clutch hole. You may need to use considerable turning force at first to get the old plug to start to “unscrew” itself.
- About 25 or so revolutions of the screwdriver will be needed to withdraw the plug completely.
- Place a “new” clutch plug down the hole.
- Place 2 – 3 drops of light machine oil down the hole.
- Replace clutch knob. Repeat above steps with the remaining seven “old” clutch knobs.

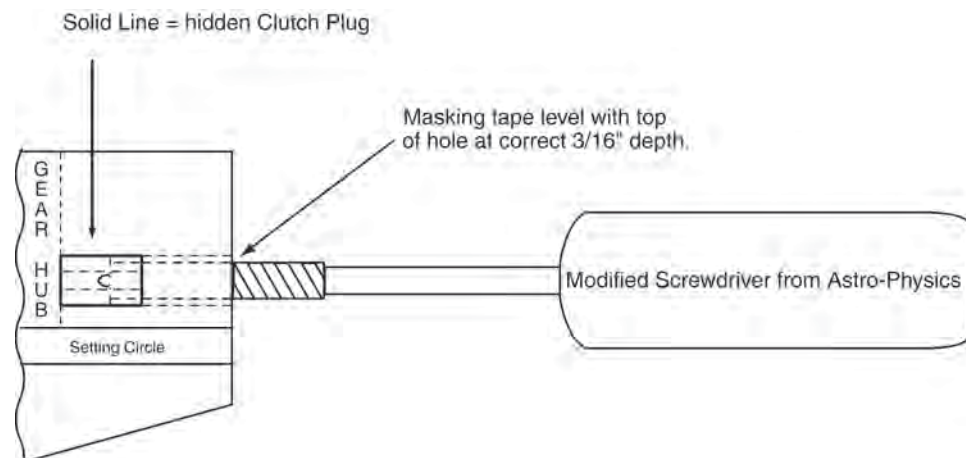

Construct Your Own Clutch Plug Extraction Tool

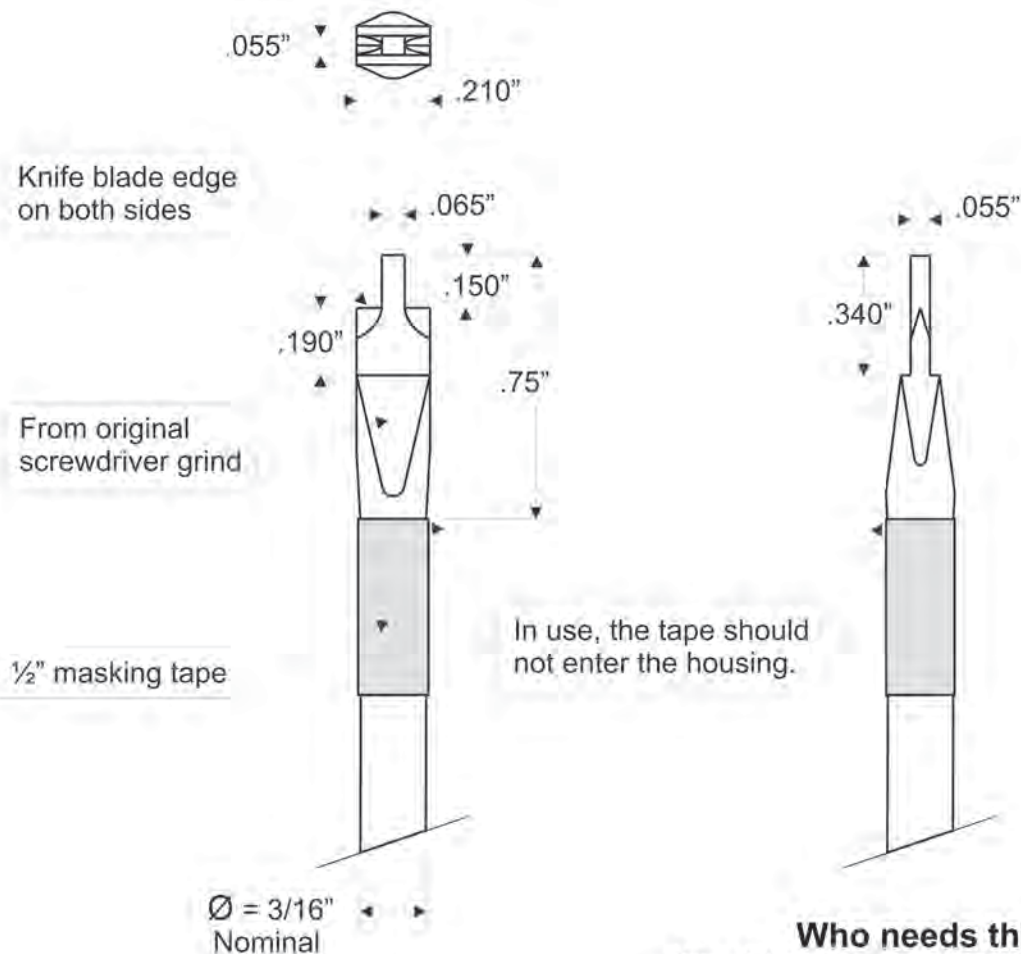

Clutch Plug Extraction Tool For 900 and 1200 Mounts Tip Details

SCALE: 2 : 1

Dimensions $\pm .0025$ inch

Date: 8-4-05

Drawn by: H.K.H.

Data by: W.A.P.

The tool is made from grinding the tip of standard 3/16 inch flat head screw-driver of 4 - 6 inch length.

Who needs this tool?

If the clutch knobs of your 900 or 1200 mount are tightened down with excessive force, the plugs under the knobs may deform and splay out. This will cause your mount to feel very stiff and you will be unable to back off the pressure of the clutch knobs. Once this happens, the clutch plugs need to be replaced.

Solution:


We have developed a tool that will successfully remove the clutch plugs so that you can install new ones. We offer this diagram for those people who wish to make their own tool. We also offer the tool for sale as part #M0100. Please call Astro-Physics for pricing.

Call Astro-Physics to order the clutch plugs, part # M12665-A. Please **do not** try to substitute your own clutch plugs since incorrect dimensions or composition of the material can impair the performance of your mount. Instructions will be provided with the new clutch plugs and are also available from the Technical Support section of our website.

CHARACTERIZING THE DEC. AXIS MOTIONS


These instructions explain how to use *MaxImDL*™ software as a tool for characterizing any problems with the Declination axis movements of your mount. However, Ray Gralak's *PulseGuide*™ software offers an easier and more extensive evaluation procedure. *PulseGuide*™ is available as a free download through our Web site.

Step 1

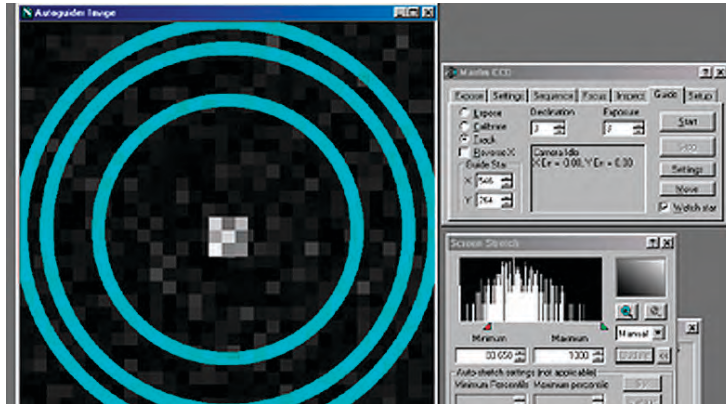


Acquire a reasonably bright guide star and begin guiding in R.A. only - turn off Dec. guiding (note X and Y are switched on the Maxim parameter page, as of v3.07). Use a 1 second or faster refresh rate so you can see the motion of the guide star as you begin to move it around. Magnify the screen to 1600x and place the cursor in the middle as shown. Check to make sure that the mount is guiding adequately in R.A., and that the guide star is not bouncing around due to poor seeing. Best results will be achieved when the R.A. guiding is 0.5 pixels average in R.A..

Step 2

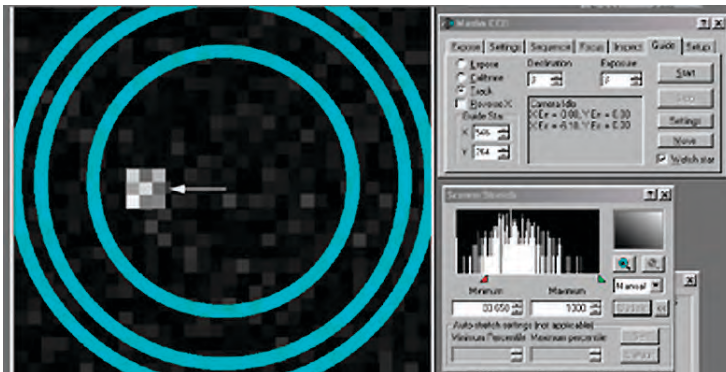

Put the keypad button rate at 0.5x. Press the keypad North button until the guide star has moved approximately 6 pixels from the center. Now press the South button in very short pulses and note which direction the star moves. It should move back toward the middle after a few button presses. It might move slightly up or down, or it might continue to move further away from the middle, or any combination. Please note exactly how far, and in which direction, the guide star moves (pixel position is displayed in the guide box at right in Maxim). Please allow a moment for the star to settle down after each button press.

Step 3

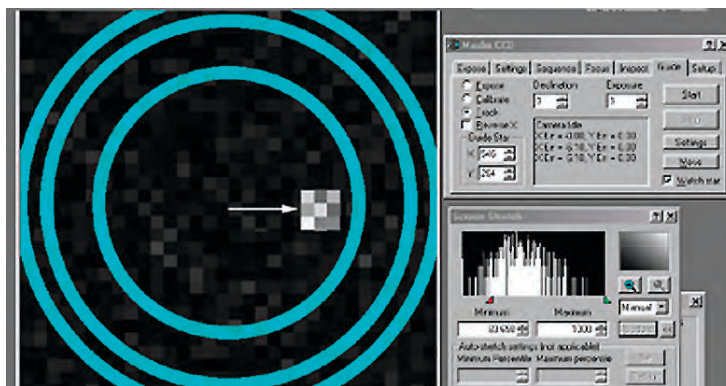

Press the South keypad button until the star has moved 6 pixels off the center in the opposite direction. Repeat Step 2 and note exactly the motion of the guide star as you move it with the pulsed motion at 0.5x.

You may wish to enable Track Log to record the numbers for further study. Please note on the log what you did at what time so the results will be useful later.

You have now characterized the Dec. axis.

ASTRO-PHYSICS MOUNTING PLATE FASTENER CHART

A-P Part #	Description	Ships with:
FP1500	15" Flat Plate	(4) 1/4-20x5/8" SHCS [for mounting to 400, 900 or Mach1GTO] (4) M6-1.0x20mm SHCS [for mounting to 600E] (4) 1/4-20x3/4" SHCS [for mounting to 1200]
FP1800	18" Flat Plate	(6) 1/4-20x1" FHSCS [for mounting to 900 or 1200] (4) 1/4-20x1-1/4" FHSCS [Mach1GTO]
DOVE08	8" Dovetail Plate	(4) 1/4-20x1/2" SHCS [for mounting to 400] (4) M6-1.0x16mm FHSCS [for mounting to 600E] (4) 1/4-20x5/8" SHCS [for mounting to 900 or Mach1GTO, requires Q4047] [or to attach to SBD13SS or SBD16SS] (4) 10-32x3/4" SHCS [for mounting as Accessory Plate onto A-P rings]
DOVE15	15" Dovetail Plate	(4) 1/4-20x1/2" FHSCS [for mounting to 400 or Mach1GTO] (4) M6-1.0x16mm FHSCS [for mounting to 600E] (4) 1/4-20x5/8" FHSCS [for mounting to 900 or 1200] (4) 10-32x3/4" SHCS [for mounting as Accessory Plate onto A-P rings]
DOVELM2	8.5" Dovetail Plate for Losmandy D Series Plate	(4) 1/4-20x5/8" SHCS [for mounting 400 or Mach1GTO] (4) M6-1.0x20mm SHCS [for mounting 600E] (2) 1/4-20x5/8" FHSCS [for mounting to 1200] ** (4) 1/4-20x3/4" SHCS [for mounting to 900 or 1200] ** [or to attach to SBD13SS or SBD16SS]
DOVELM16/S	16" Dovetail Plate for Losmandy D Series Plate for 1200GTO - "S" version for 900 or Mach1GTO	(6) 1/4-20x1" SHCS [for mounting to 900 or 1200] (4) 1/4-20x7/8" SHCS [for Mach1GTO]
DOVELM162	16" Dovetail Plate for Losmandy D Series Plate for 900, 1200, Mach1GTO. Also for 3600GTO w/ SB3622 or SB3627 Can also be mounted on AP ring tops with blocks	(6) 1/4-20x1" SHCS [for mounting to 900, 1200 or Mach1GTO (uses 4)] [or to attach to SBD13SS or SBD16SS] (1) 1/4-20x3/4" FHSCS [opt. 900 or 1200 for end positions] (4) 1/4-20x3/4" SHCS [for SB3622 in side-by-side configuration and for attachment to blocks for ring-top mounting]
900RP	15" Ribbed Plate for 900 or Mach1GTO	(6) 1/4-20x1" FHSCS [for mounting to 900] (4) 1/4-20x1-1/4" FHSCS [for mounting Mach1GTO]
1200RP15	15" Ribbed Plate for 1200	(6) 1/4-20x3/4" SHCS [for mounting to 1200]
1200RP	24" Ribbed Plate for 1200	(6) 1/4-20x1" SHCS [for mounting to 1200]
Q4047	900/Mach1GTO Adapter for use with DOVE08	(6) 1/4-20x5/8" FHSCS [for mounting to 900] (4) 1/4-20x1" FHSCS [for mounting to Mach1GTO]
SB0800 OR SB1000 OR SB1500	7" and 10" Sliding Bars for DOVE08 or ACPLTR and 15" Sliding Bar for DOVE15	(2) 1/4-20x1/2" SHCS (2) Acorn Nuts (2) 1/4-20 Nuts (2) 1/4-20x3/8" SHCS (1) 10-32x5/8" FHSCS (1) 10-32 Nut
SBD12	12" Sliding Bar for the Losmandy D-Series Dovetail Saddle Plates	(4) 1/4-20x1" low profile SHCS [for attaching the SBDAPB or LMAPBLOCKS] (4) 1/4-20x1-1/4" FHCS [for attaching directly to AP Rings] (4) 1/4-20x1/2" low profile SHCS (3) 1/4-20x3/8" SHCS [2 for Stowaway - 1 for Safety Stop] (2) 1/4-20x7/8" SHCS [Stowaway with SB0550 as spacer]
SBD16	16" x 5" Wide Sliding Bar for the Losmandy D-Series Dovetail Saddle Plates	(4) 1/4-20x3/4" SHCS [for attaching the SBDAPB or LMAPBLOCKS] (4) 1/4-20x1-1/4" FHCS [for attaching directly to AP Rings] (1) 1/4-20x3/8" SHCS [for Safety Stop]
SBDAPB	AP Riser / Spacer Blocks	(4) #10-32 x 1/2" SHCS [for attaching to mounting ring tops]
SBDTB	Adapter Blocks for large Taks - Mewlon, BRC & FRC	(4) M10 x 20 mm SHCS [for attaching to SBD16]
SBD13SS OR SBD16SS	13" or 16" Side-by-side Dovetail Plate for Losmandy D-Series Dovetail Saddle Plates	(2) 1/4-20x3/8" SHCS [for Safety Stops -required at both ends]
SBD2V	12" Losmandy D-Series Male to Vixen Style (Losmandy V-Series) Female Adapter / Sliding Bar	(1) 1/4-20x1/4" low profile SHCS [to replace Safety Stop on V plate] (1) 1/4-20x1/4" SHCS [Safety Stop for SBD2V]
LT2APM	Losmandy Tripod to Astro-Physics Mount Adapter Plate	(3) 5/16-18x5/8" SHCS (4) 1/4-20x5/8" SHCS (4) 1/4-20x1" SHCS (3) 3/8-16x3/4 SHCS
CBAPT, TRAYSB & TRAYSB1	Control Box Adapter, Bi-Level Support Bar & Single Level Support Bar	(1) 1/4-20x3/4" FHSCS (1) 1/4-20x1" FHSCS (1) 5/16-18x1" BHSCS (2) 5/16-18x3/4" BHSCS
DOVEPW	16.5" Dovetail Saddle for Planewave 7.652" dovetail on AP 1200 and 3600GTO	(6) 3/8-16x1" SHCS
DOVE3622	22" Dovetail Saddle Plate for 3600GTO	(6) 3/8-16x1" SHCS (4) 3/8-16x1-1/2" SHCS
SB3622 OR SB3627	Dovetail Sliding Bar for DOVE3622	(2) 3/8-16x1/2" low profile SHCS (4) 1/4-20x7/8" SHCS for lock-down

