
SBPW23 23" x 7.65" P-style Dovetail Plate

Use with the 16.5" P-style Dovetail Saddle Plate (DOVEPW)

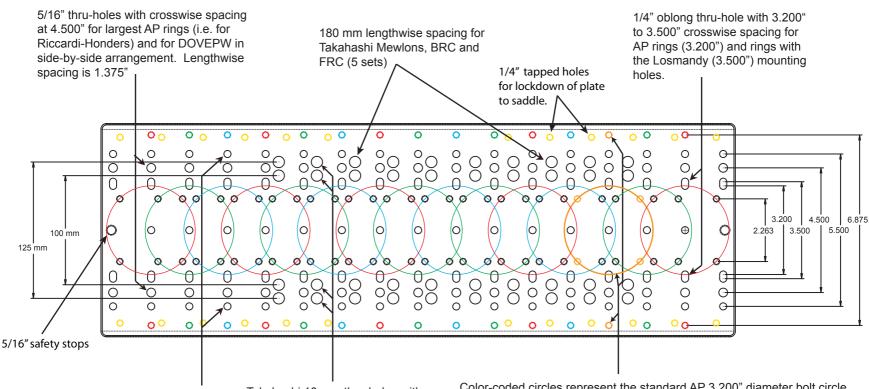

1/4" thru-holes with 5.500" crosswise spacing are available for custom applications. Lengthwise spacing is at 1.375" for the 5.5" sets.

Takahashi 10 mm thru-holes with 100 mm and 125 mm crosswise spacing used for large rings and Takahashi riser blocks (SBDTB).

Color-coded circles represent the standard AP 3.200" diameter bolt circle. Each circle connects four 1/4-20 tapped holes that are used when attaching the DOVELM162 in side-by-side configurations. Each bolt circle is also associated with a pair of tapped 1/4-20 holes with 6.875" crosswise hole spacing for additional attachment points. The bolt circles are spaced lengthwise at 1.375" intervals.